


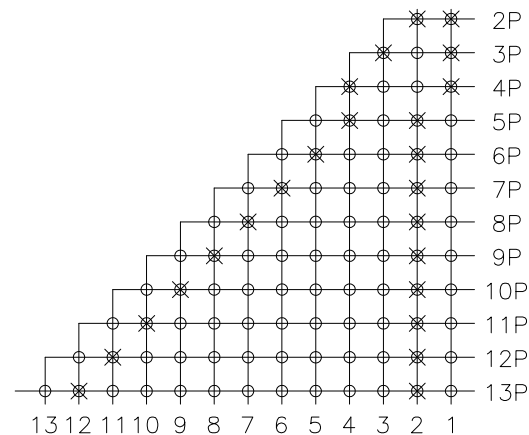
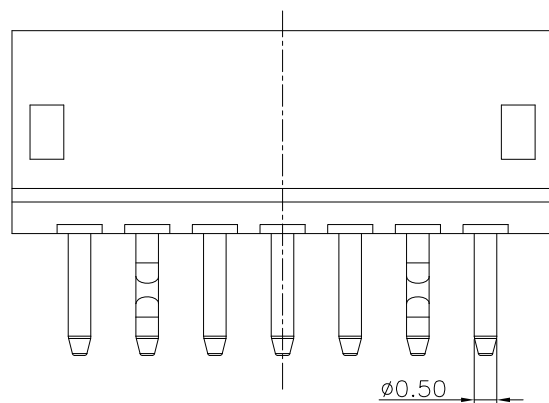
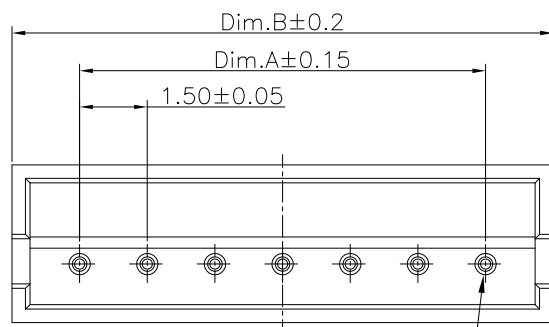


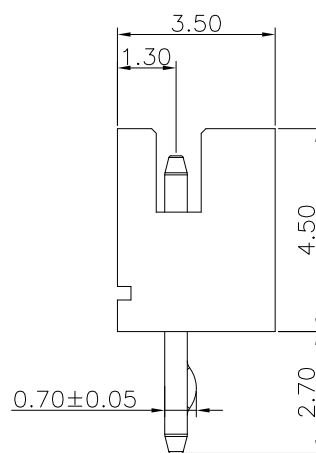

Beruffed Of The Chart:1:2

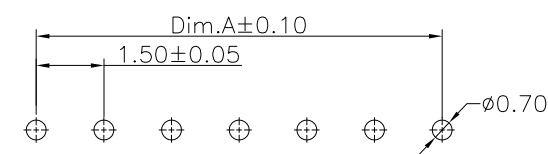

Specifications:
 Current Rating: 1.0A AC/DC
 Voltage Rating: 50V AC/DC
 Contact Resistance: 40m Ohm. Max.
 Insulation Resistance: 100M Ohm. Min.
 Withstanding Voltage: 500V AC/minute
 Operating Temperature Range: -25°~+85°C
 Material And Finish:
 Insulator:Nylon 66 or Nylon 9T (UL94V-0)
 Insulator Color:Beige or Black  
 Contact:Brass
 Finish:Tin Plated



P.C.B Layout

Dimension:

Circuits	A	B	Circuits	A	B	Circuits	A	B	Circuits	A	B
2	1.50	4.50	5	6.00	9.00	8	10.50	13.50	11	15.00	18.00
3	3.00	6.00	6	7.50	10.50	9	12.00	15.00	12	16.50	19.50
4	4.50	7.50	7	9.00	12.00	10	13.50	16.50	13	18.00	21.00

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1


DATE

SIZE A4

PPOJECTION 

TOLERANCES ARE

X. ±
 .X ± 0.15
 .XX ± 0.10
 .XXX ±
 ANG ±



ORDER INFORMATION

ZH-D-xx-LF
 SERIES | LEADFREE
 02~13WAY
 DIP 180°

DESCRIPTION: 1.5mm Wafer Straight Type