



Pcs/1bag
1000

ML-S-1X01



Pcs/1bag
1000

ML-S-1X02

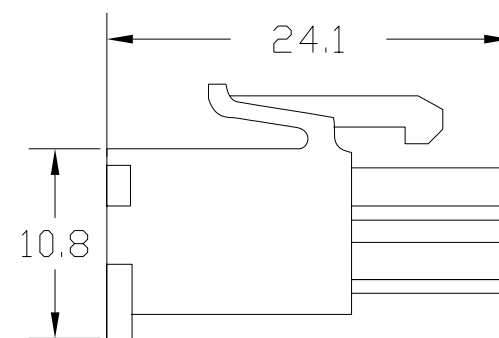

SPECIFICATIONS

Voltage rating:300V AC,DC


Current rating:5A AC,DC

Withstanding voltage:1500V AC/minute

Insulation resistance:1000MΩHM min


Temperature range:-25°C~+90°C

Material:UL94V-2 Nylon 66

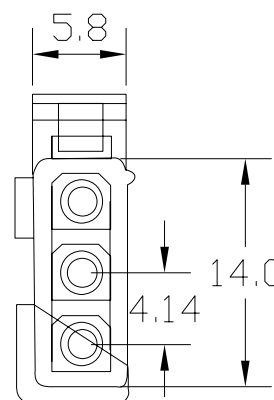

Pcs/1bag
1000

ML-S-1X03

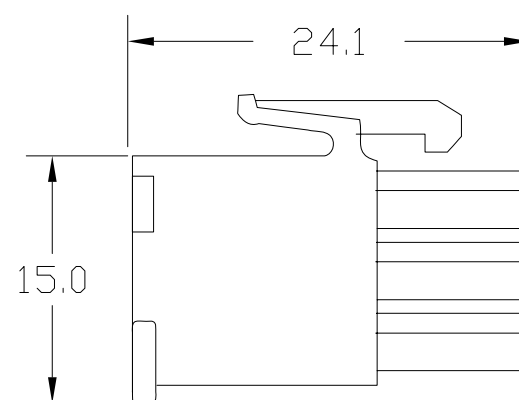

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±


.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION



ORDER INFORMATION

ML-S-1Xxx-LF
SERIES LEADFREE
1X01:01 WAY
1X03:03 WAY
FEMALE HOUSING

DESCRIPTION: