


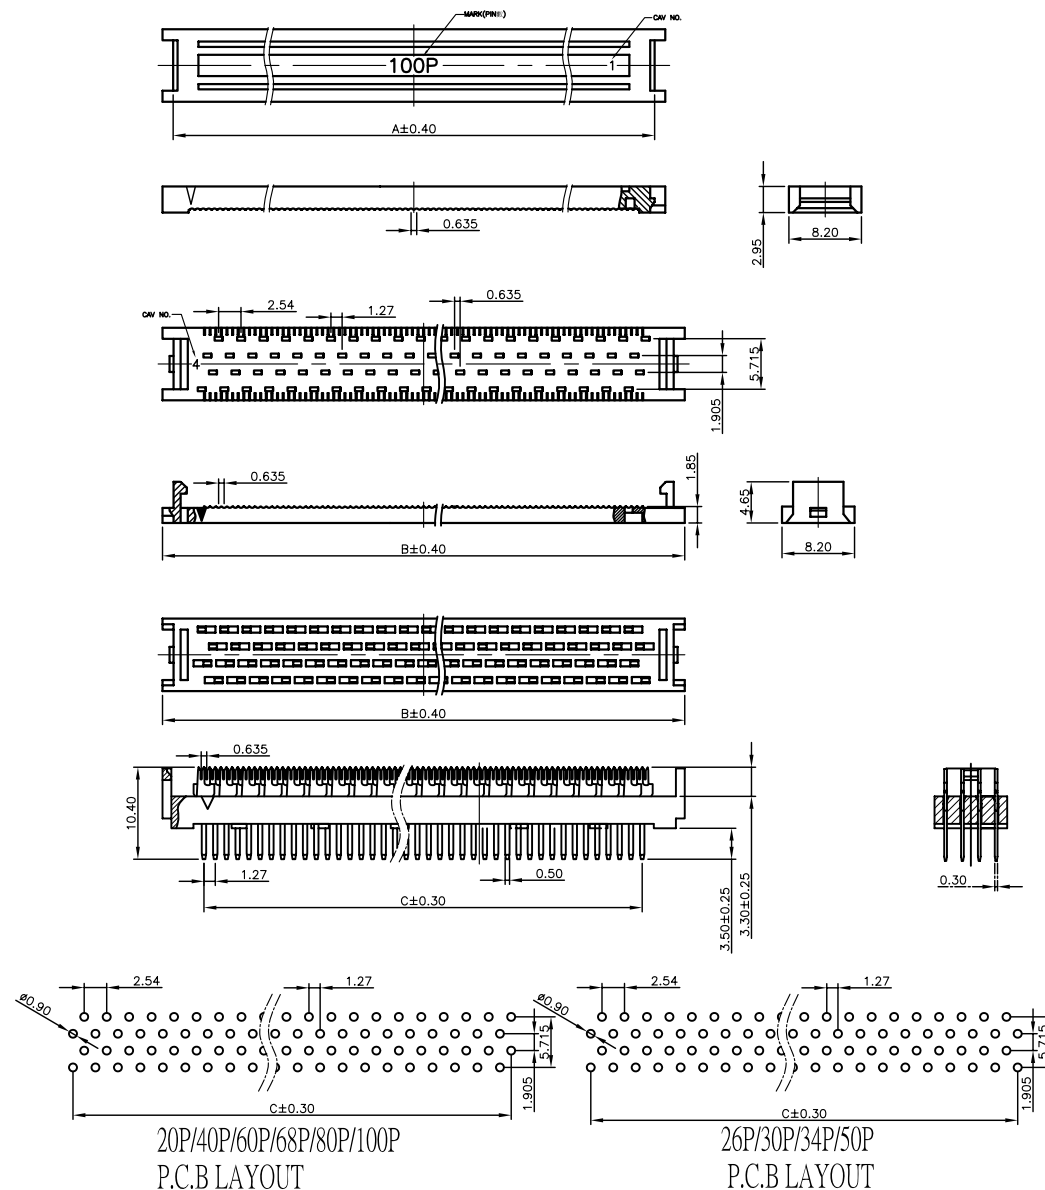

NOTES:

1. MATERIAL

1.1 HOUSING: NYLON66 UL94V-0.

1.2 TERMINAL: COPPER ALLOY($t=0.3\text{mm}$);
TIN PLATED AND NICKEL.

2. SPECIFICATION

2.1 CURRENT RATING: 0.5A MAX.

2.2 DIELECTRIC WITHSTANDING VOLTAGE:

300V AC R.M.S FOR ONE MINUTE.

2.3 INSULATION RESISTANCE: 1000M Ω MIN.

AT 500V DC.

2.4 OPERATING TEMPERATURE: $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$.

20P	18.80	20.80	11.43
26P	22.61	24.61	15.24
30P	25.15	27.15	17.78
34P	27.69	29.69	20.32
40P	31.42	33.50	24.13
50P	37.77	39.85	30.48
60P	44.20	46.20	36.83
68P	49.20	51.40	41.91
80P	56.82	59.00	49.53
100P	69.60	71.60	62.23
P數	A	B	C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$


.X $\pm$

.XX $\pm$

.XXX $\pm$

ANG $\pm$

PPOJECTION



ORDER INFORMATION

HIP40-C2S-xxx-LF

SERIES | LEADFREE
020~100WAY
0.635 CABLE
TWO TYPE

DESCRIPTION: