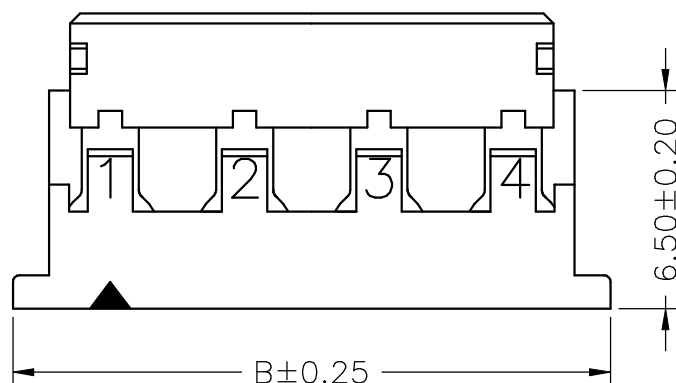
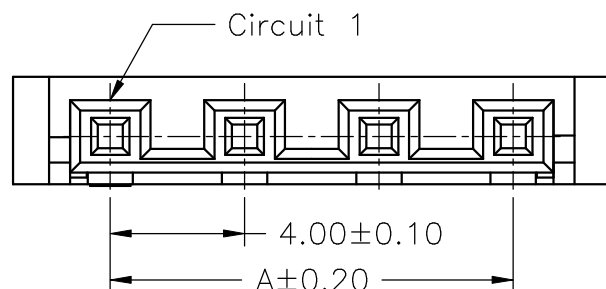
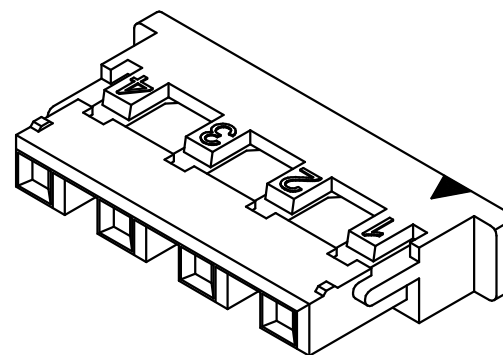


SPECIFICATIONS

Current Rating: 1A AC,DC
Voltage Rating: 600V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1800V AC/minute
Material: Nylon66,UL94V-0
Color: Natural(White)

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
BH-H-02	4.00	9.80
BH-H-03	8.00	13.80
BH-H-04	12.00	17.80
BH-H-05	16.00	21.80

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X, ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

BH-H-xx-LF
SERIES | T | LEADFREE
02-05 WAY
HOUSING

DESCRIPTION: 4.00mm PITCH HOUSING