






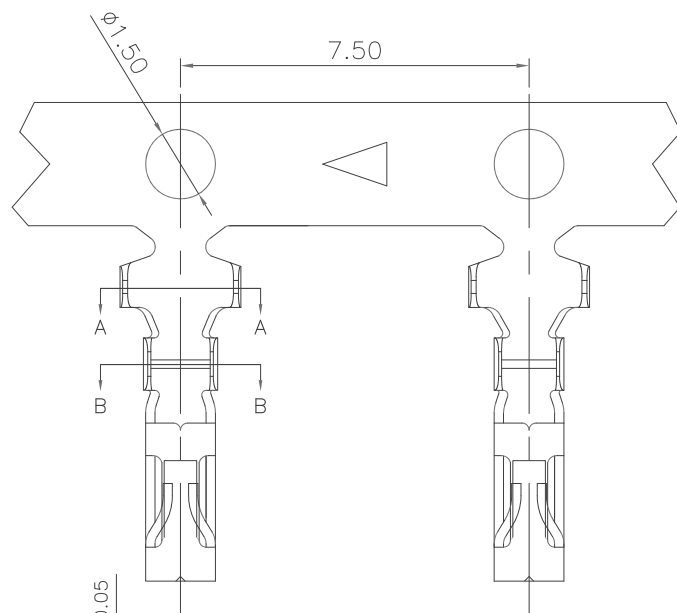

Section:A-A



Section:B-B

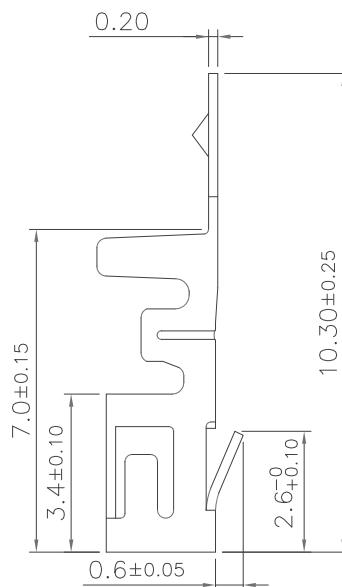

Specifications:
 Current Rating: 3.0A AC,DC
 Voltage Rating: 250V AC,DC
 Contact Resistance: 20m ohm Max
 Withstanding Voltage: 1000V AC/minute
 Operating Temperature Range: -40°C ~ +85°C
 Application wire: Awg#22-#28

Materials:
 Contact: Copper Alloy
 Plated: Bright Tin Plated
 Package: 8000pcs/Reel

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

TOLERANCES ARE

X. ±
 .X ± 0.15
 .XX ± 0.10
 .XXX ± 0.05
 ANG ±

PPOJECTION



ORDER INFORMATION

RM-T-22-LF
 SERIES | LEADFREE
 22~28AWG
 TERMINAL

DESCRIPTION: 2.5mm Wire To Board Housing Terminal