
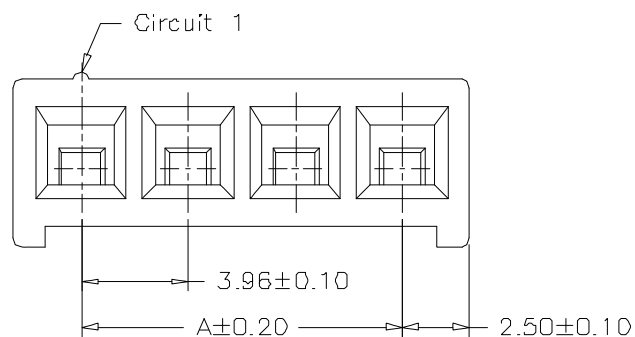


P.C.B. LAYOUT

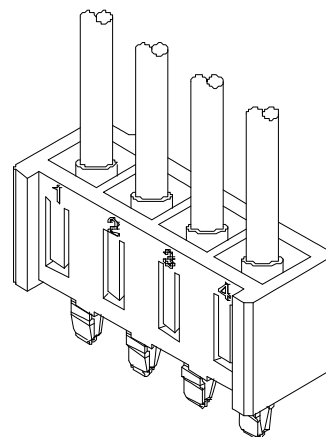

SPECIFICATIONS

Current Rating: 7A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-0

Color: Natural(White)

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
SDN-H-02	3.96	8.96
SDN-H-03	7.92	12.92
SDN-H-04	11.88	16.88
SDN-H-05	15.84	20.84
SDN-H-06	19.80	24.80
SDN-H-07	23.76	28.76
SDN-H-08	27.72	32.72
SDN-H-09	31.68	36.68
SDN-H-10	35.64	40.64
SDN-H-11	39.60	44.60
SDN-H-12	43.56	48.56
SDN-H-13	47.52	52.52
SDN-H-14	51.48	56.48
SDN-H-15	55.44	60.44

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X.±
.X±
.XX±
.XXX±
ANG±



ORDER INFORMATION

SDN-H-xx-LF
SERIES | LEADFREE
02~15 WAY
HOUSING

DESCRIPTION: 3.96mm 180° Housing without polarizing boss