

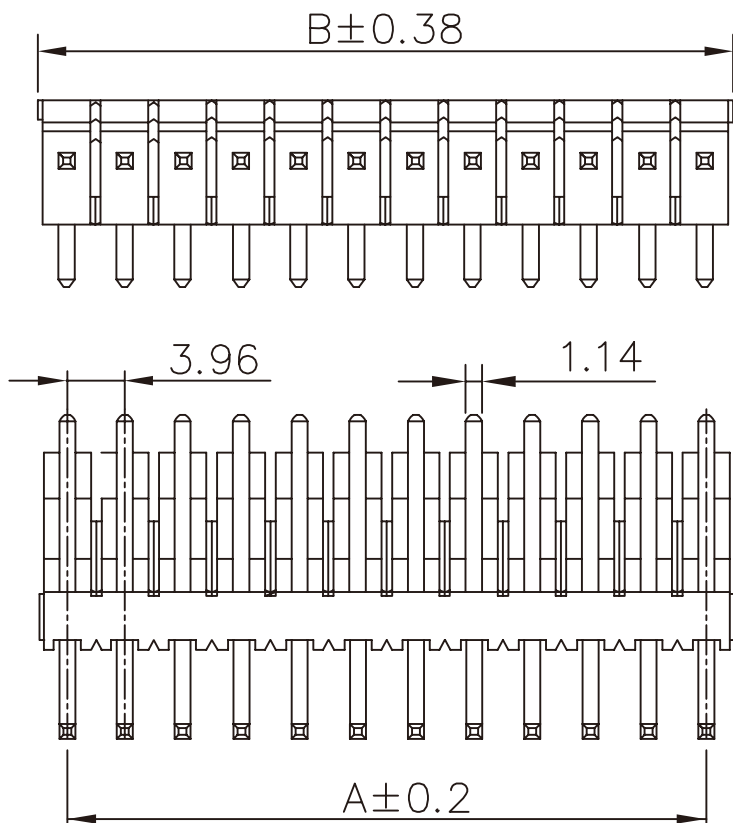


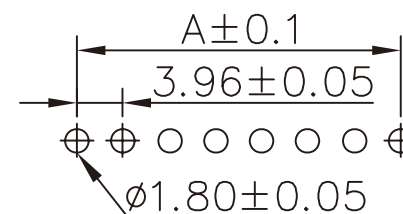

Material:

Insulation: Glass filled polyester UL 94V-0
Color White(Nature)

Contact: Brass

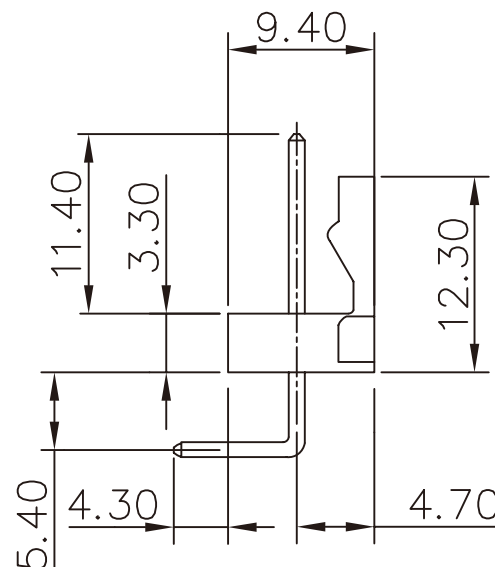

A = 3.96 X NO. OF SPACES

B = A + 3.96

* Available in 2 through 24 circuits

Recommended P.C. Board Layout

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1


DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PJECTION



ORDER INFORMATION

KK-RB-xx-LF
SERIES | LEADFREE
02~24WAY
BREAKAWAY
DIP 90°

DESCRIPTION: 2.54mm STRAIGHT DIP HEADER