
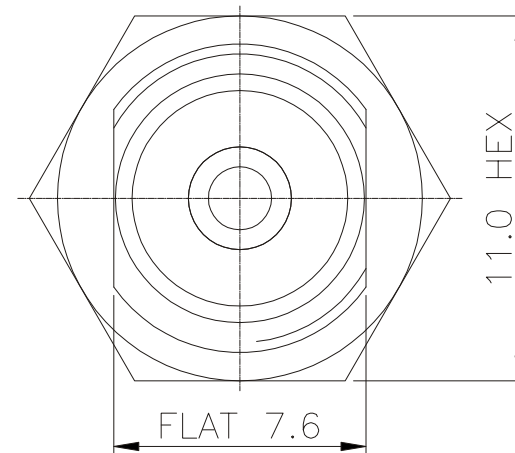


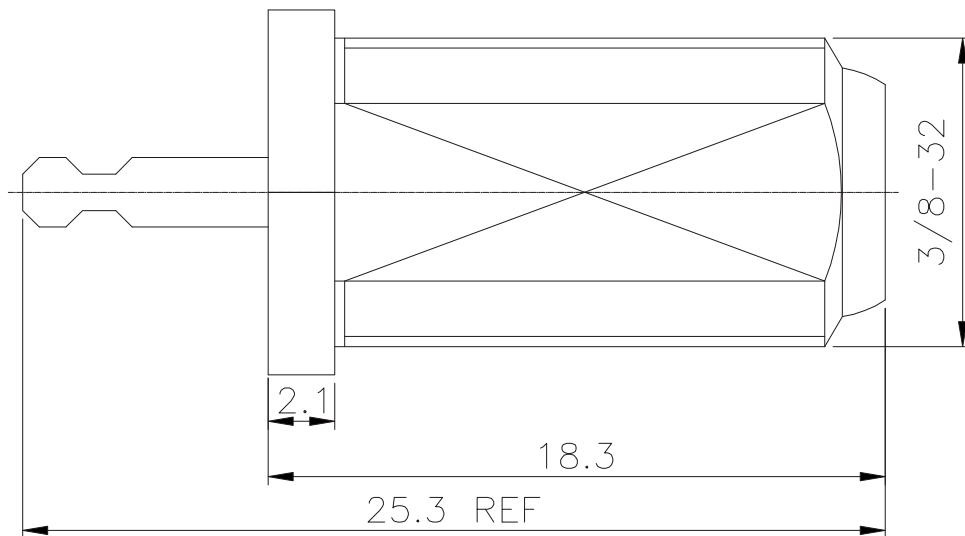

Electrical Specifications:

Working Voltage: 250 VRMS max

Dielectric Withstanding Voltage: 500 VRMS min

Insulator Resistance: 1000 Megohms min

Contact Resistance: Center Contact - 5 Milliohms Max

Outer Contact - 1 Milliohms Max

Impedance: 75 ohm

VSWR: 1.5 max. 0-1,000 MHZ

4	INSULATOR	P.P	WHITE	1
3	INSULATOR	P.P	WHITE	1
2	PIN	BRASS	TIN	1
1	BODY	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	QTY

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

0.5-5 =±0.2
5-30 =±0.4
30-120 =±0.6
120-315 =±1
315-1000 =±1.6
1000-2000 =±2.4



ORDER INFORMATION

F-JSPB257-75-LF
SERIES | LEADFREE
75 OHM
FLAT 7.6mm
LONG 25.3mm
JACK | PANEL BACK
SOLDER

DESCRIPTION: F FEMALE BULKHEAD