



RECOMMENDED P.C.B LAYOUT FOR 10

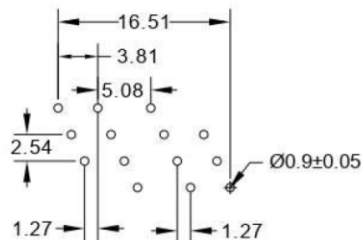


RECOMMENDED P.C.B LAYOUT FOR 14





POSITION	A	B
10	17.60	11.43
14	22.68	16.51
16	25.22	19.05
20	30.30	24.13
26	37.92	31.75
34	48.08	41.91
40	55.70	49.53
50	68.40	62.23
60	81.10	74.93
64	86.18	80.01

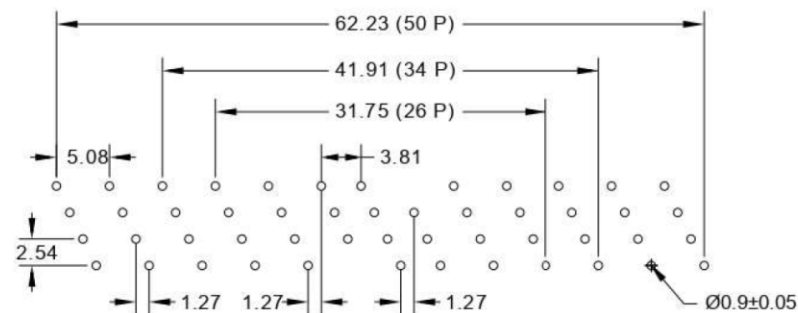

RECOMMENDED P.C.B LAYOUT FOR 26,34,50

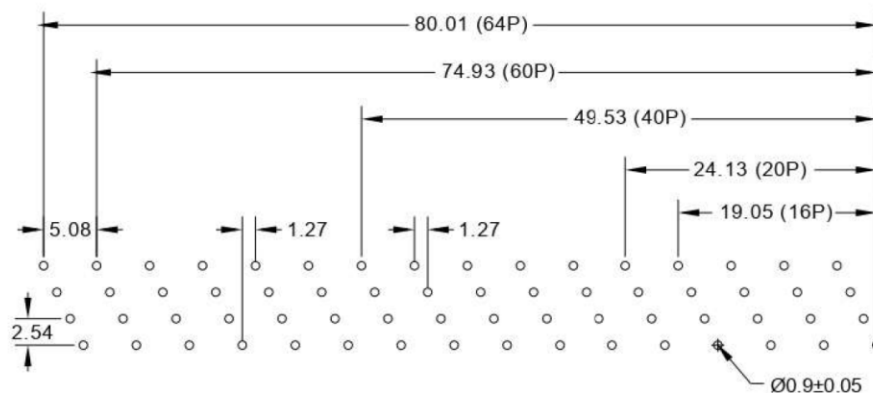

RECOMMENDED P.C.B LAYOUT FOR 16,20,40,60,64

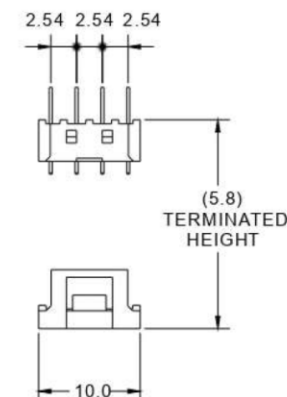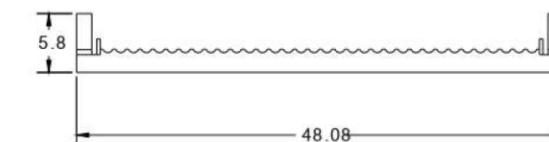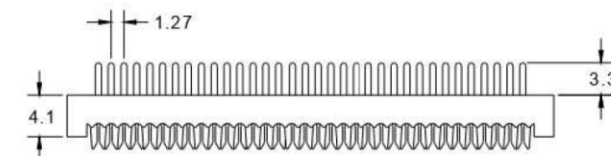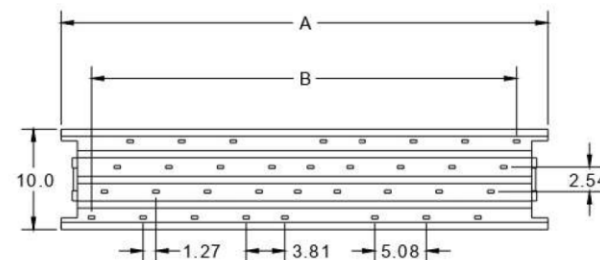

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±


.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION



ORDER INFORMATION

IP40-C2-xx-LF
SERIES | LEADFREE
10-64WAY
TWO TYPE

DESCRIPTION: 2.54mm*7.62mm widened four-row DIP IDC