

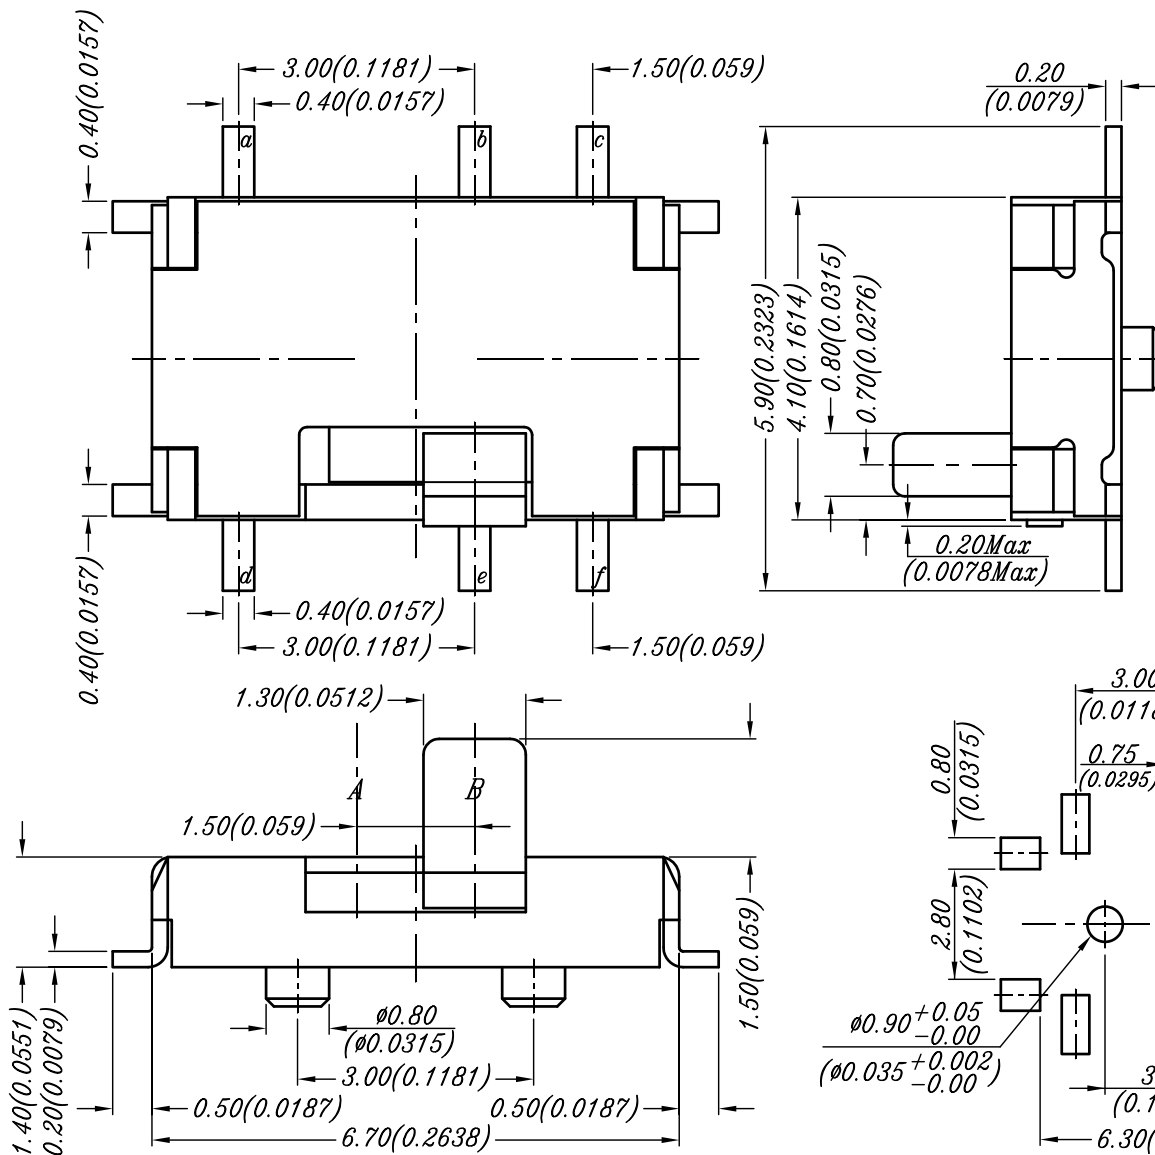


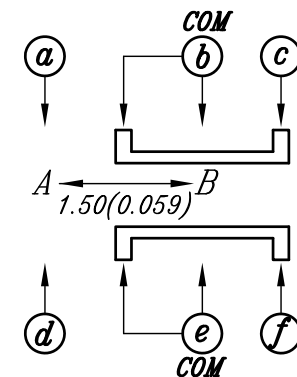

NOTE:

1. ALL DIMENSIONS ARE IN MILLIMETERS, BRACKETED DIMENSIONS ARE IN INCHES.

2. GENERAL TOLERANCES MAX. $\pm 0.20\text{mm}$.

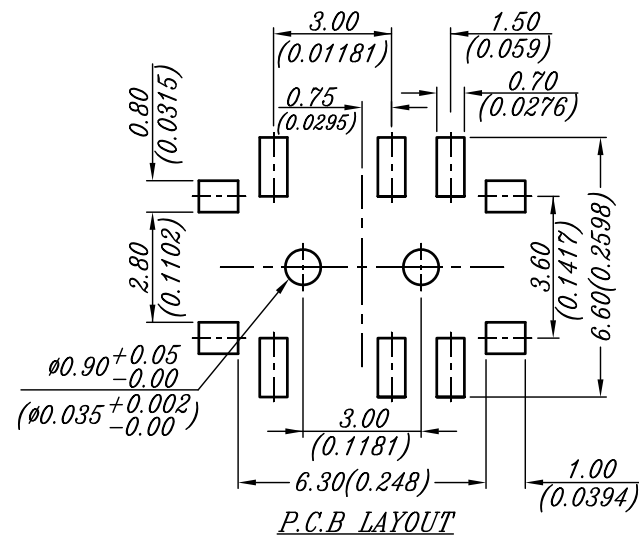

CIRCUIT DIAGRAM

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$


.X ± 0.20

.XX ± 0.10

.XXX $\pm$

ANG $\pm$

PPOJECTION



ORDER INFORMATION

SLSW15-VP015R-2X04E2-LF

SERIES

DIP 180°

REEL

POST

LEADFREE

EMPTY 2nd PIN

8 WAY

KNOB LENGTH 1.5mm

DESCRIPTION:

