

# Specifications:

Current rating:5.0 AC/DC

Voltage rating:250V AC/DC

Contact resistance:20m ohm. max.

Insulator resistance:1000M ohm. Min.



Withstanding voltage:1500V AC for one minute

Operating temperature range:-25°C to + 105°C




Application wire:AWG#26 TO #18

Material and Finish:



Insulator:high Temp. Plastic(UL94V-2)





PS-SE-1X02

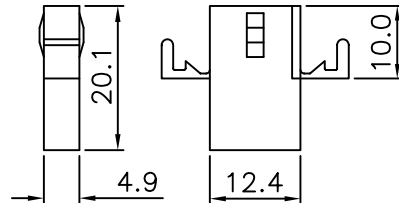

PS-SE-1X03

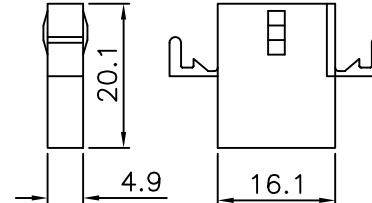

PS-SE-1X04

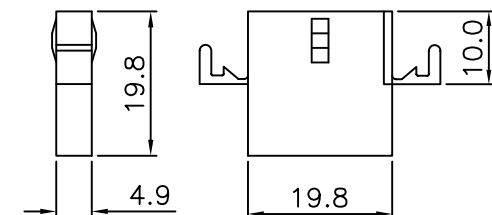

PS-SE-1X05

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±



ORDER INFORMATION

PS-SE-1Xxx-LF

SERIES  
LEADFREE  
1X02:02 WAY  
1X05:05 WAY  
EAR  
FEMALE HOUSING

DESCRIPTION: