



Pcs/1bag
1000

ML-P-1X01

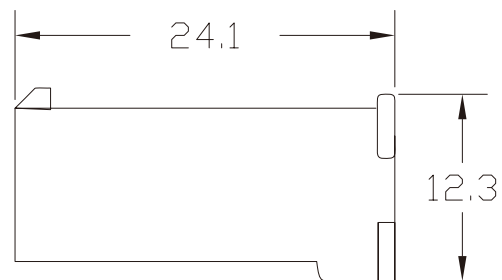

Pcs/1bag
1000

ML-P-1X02

SPECIFICATIONS

Voltage rating:300V AC,DC



Current rating:5A AC,DC

Withstanding voltage:1500V AC/minute

Insulation resistance:1000MΩHM min

Temperature range:-25°C~+90°C

Material:UL94V-2 Nylon 66

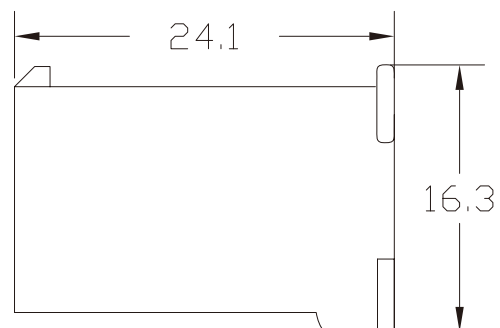

Pcs/1bag
1000

ML-P-1X03

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1


DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

P PROJECTION



ORDER INFORMATION

ML-P-1Xxx-LF
SERIES | LEADFREE
1X01:01WAY
1X03:03WAY
MALE HOUSING

DESCRIPTION: