
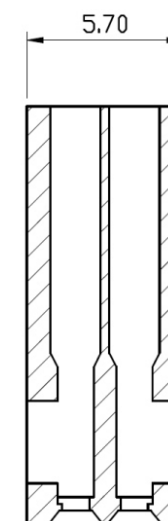
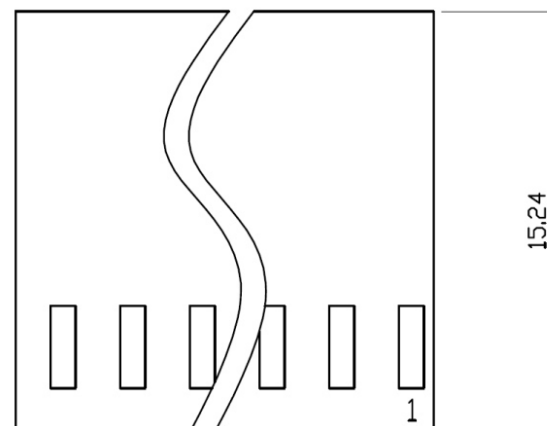


- Material: Nylon 66, UL 94V-1
- Pitch: 2.54mm
- Poles: Double row 4-80P

SPECIFICATIONS

- Current Rating: 3A AC,DC
- Voltage Rating: 250V AC,DC
- Temperature Range: -25°C~+85°C
(including temperature rise)
- Contact Resistance: Initial Value / 10M Ω Max.
After environmental
testing/30M Ω Max.
- Insulation Resistance: 500M Ω Min.
- Withstanding Voltage: 1000V AC/minute
- Applicable Wire: AWG#24-26

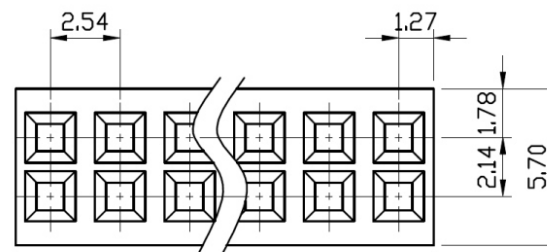

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$


.X $\pm$

.XX $\pm$

.XXX $\pm$

ANG $\pm$

PPOJECTION



ORDER INFORMATION

MOD4-H-2Xxx-LF

SERIES

LEADFREE

2X02:04WAY

2X40:80WAY

HOUSING

DESCRIPTION: