





## SPECIFICATIONS

### MATERIAL:

1. Insulator : nylon polymer UL 94-V0
2. Color : Black
3. Contacts : Sq 0.64mm Gold/Tin Sletive Plated

### ELECTRICAL:

1. Current Rating : 1.5 AMP
2. Operation Temperature : -40°C to + 105°C
3. Contact Resistance : 10 Milliohms MAX
4. Insulation Resistance : 1000 Milliohms MIN
5. Dielectric Withstanding Voltage : 500V AC

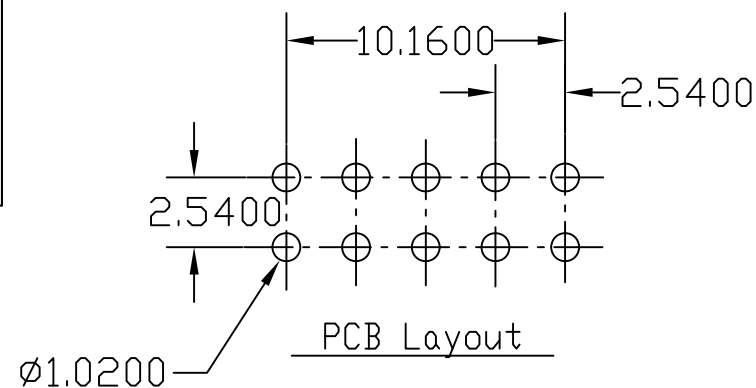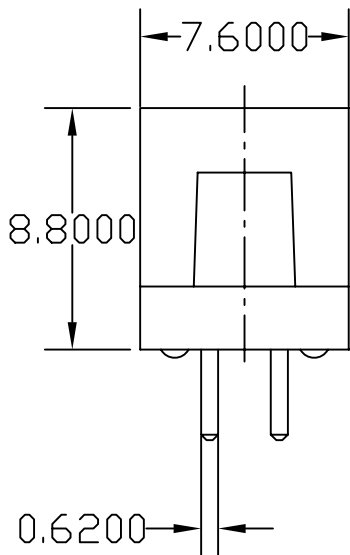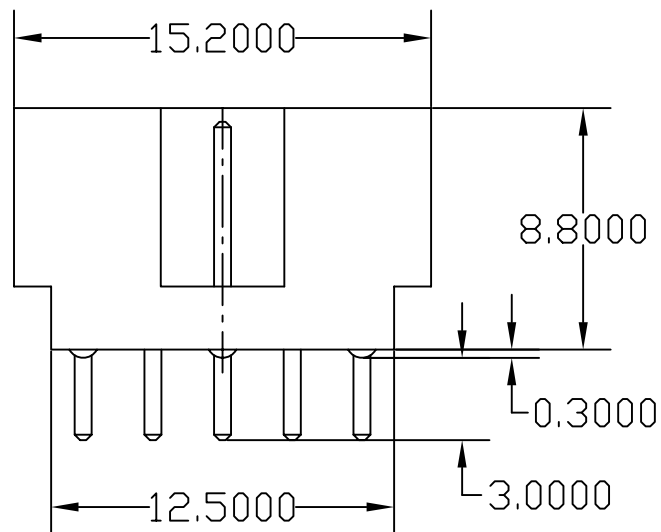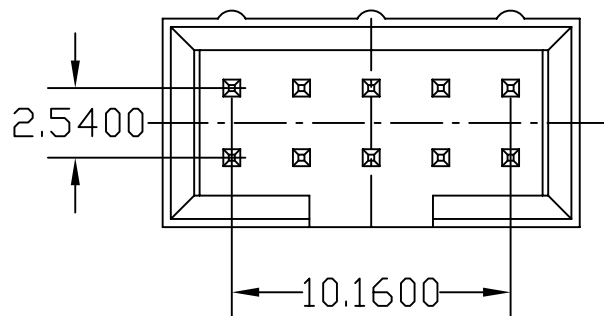

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

X, ±  
.X, ±  
.XX, ±  
.XXX, ±  
ANG, ±

PPOJECTION



### ORDER INFORMATION

PVK-DBRD-2X05-LF  
SERIES | RED | BOX | DIP 180°  
10 WAY LEADFREE

DESCRIPTION: Box Header