
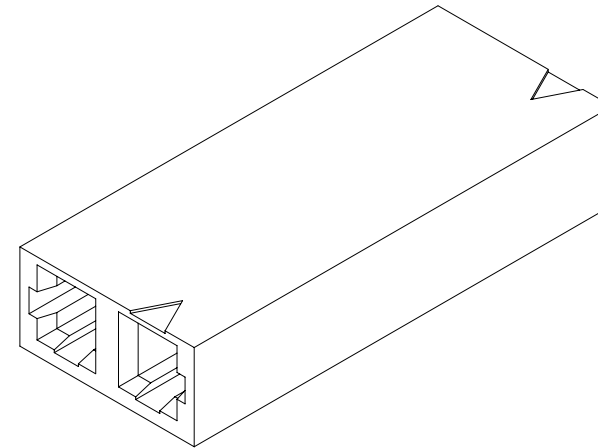
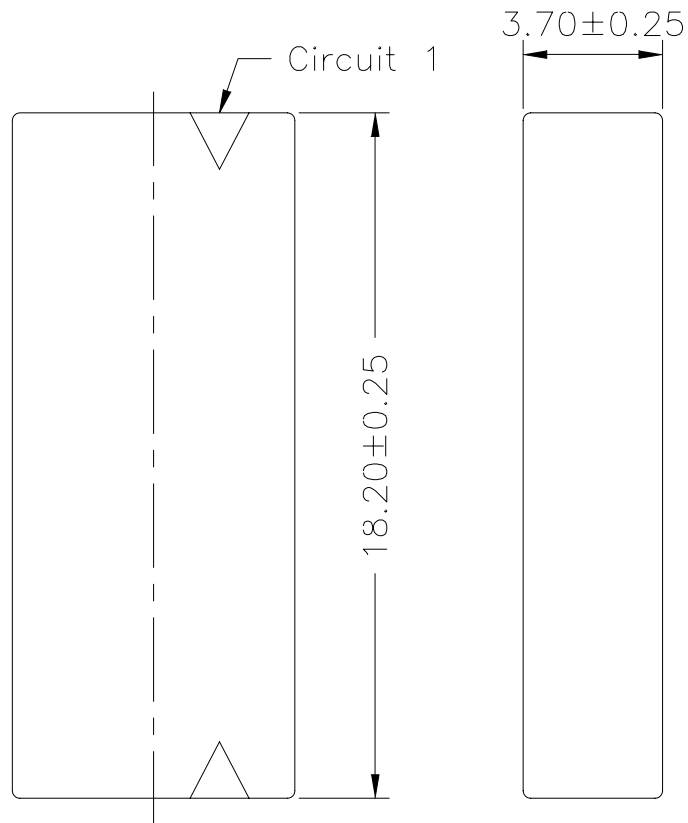


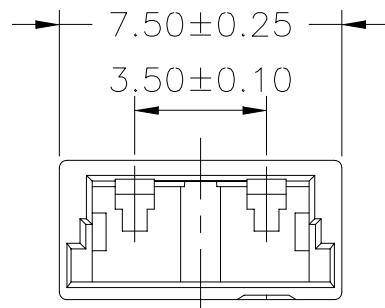

SPECIFICATIONS

Current Rating: 1A AC,DC
 Voltage Rating: 1400V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 3800V AC/minute
 Material: Nylon 66,UL94V-0

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

BHS-P-02-LF
 SERIES | T | LEADFREE
 02 WAY
 MALE HOUSING

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: 3.50mm PITCH, HOUSING-PLUG ULTRA LOW PROFILE