

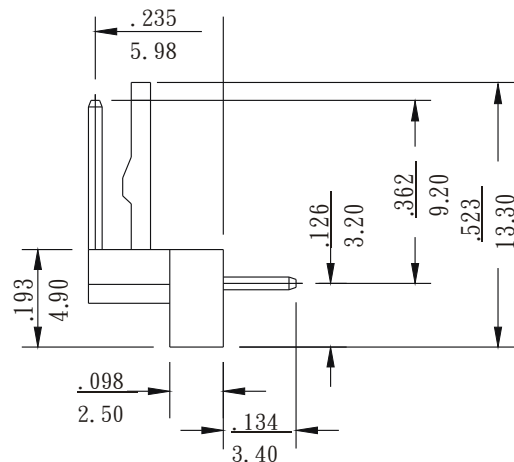


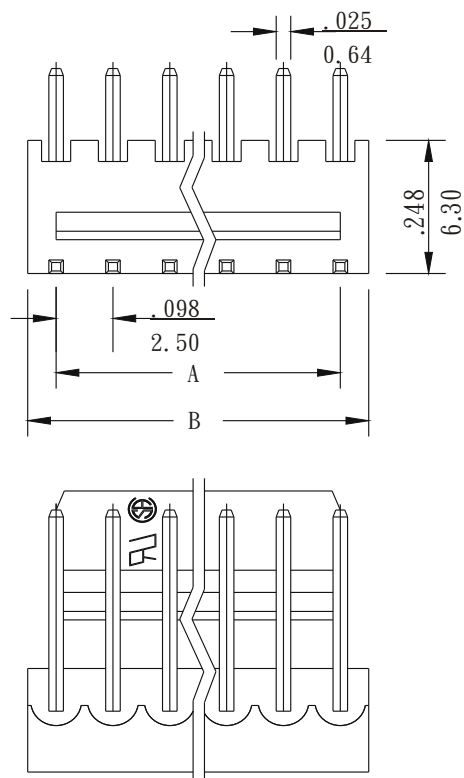

- * Material : Nylon UL 94V-2
- * Current rating : 1A, AC/DC
- * Voltage rating : 250V , AC/DC
- * .025" (0.64mm) right angle pins
- * Tin plated brass pins, plating optional
- * Various pin length available
- * Friction lock
- * 2-20 circuits available



RECOMMENDED PCB LAYOUT

Dimensional information -inch/mm (8812/8813)

Circuits	Dim. A		Dim. B		Circuits	Dim. A		Dim. B	
	inch	mm	inch	mm		inch	mm	inch	mm
2	0.098	2.50	0.197	5.00	12	1.083	27.50	1.181	30.00
3	0.197	5.00	0.295	7.50	13	1.181	30.00	1.280	32.50
4	0.295	7.50	0.394	10.00	14	1.280	32.50	1.378	35.00
5	0.394	10.00	0.492	12.50	15	1.378	35.00	1.476	37.50
6	0.492	12.50	0.591	15.00	16	1.476	37.50	1.575	40.00
7	0.591	15.00	0.689	17.50	17	1.575	40.00	1.673	42.50
8	0.689	17.50	0.787	20.00	18	1.673	42.50	1.772	45.00
9	0.787	20.00	0.886	22.50	19	1.772	45.00	1.870	47.50
10	0.886	22.50	0.984	25.00	20	1.870	47.50	1.969	50.00
11	0.984	25.00	1.083	27.50					

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

RK-RB-xx-LF
SERIES LEADFREE
02-20WAY
BRACKET
DIP 90°

DESCRIPTION: