


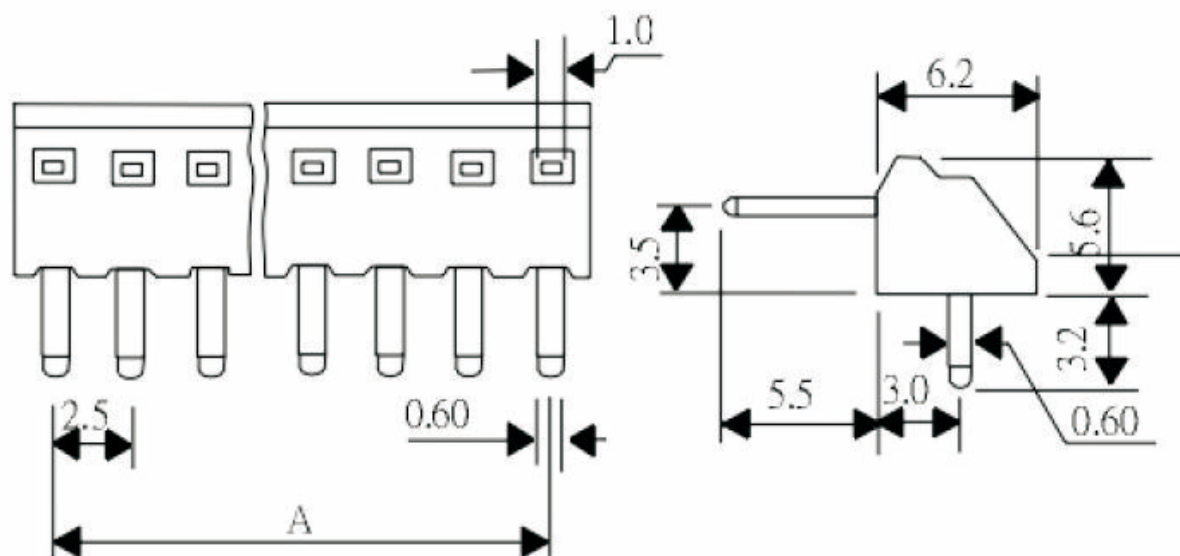

| Circuit | Dim/mm | PCS/bag | Circuit | Dim/mm | PCS/bag | Material            |
|---------|--------|---------|---------|--------|---------|---------------------|
|         | A      | 個數/袋    |         | A      | 個數/袋    |                     |
| 2       | 2.5    | 1000    | 12      | 27.5   | 500     | NYLON 66<br>UL94V-0 |
| 3       | 5.0    | 1000    | 13      | 30.0   | 500     |                     |
| 4       | 7.5    | 1000    | 14      | 32.5   | 500     |                     |
| 5       | 10.0   | 500     | 15      | 35.0   | 500     |                     |
| 6       | 12.5   | 500     | 16      | 37.5   | 500     |                     |
| 7       | 15.0   | 500     | 17      | 40.0   | 500     |                     |
| 8       | 17.5   | 500     | 18      | 42.5   | 500     |                     |
| 9       | 20.0   | 500     | 19      | 45.0   | 500     |                     |
| 10      | 22.5   | 500     | 20      | 47.5   | 500     |                     |
| 11      | 25.0   | 500     |         |        |         |                     |

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±


.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION



ORDER INFORMATION

NH-R-xx-LF  
SERIES | LEADFREE  
02~11 WAY  
DIP 90°

DESCRIPTION: