
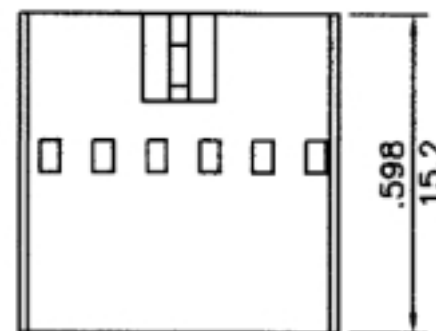


- * Poles:6-36
- * Material:PBTP UL94V-0,BLACK

Specifications

- * Current rating: 3A AC, DC
- * Voltage rating: 250V AC, DC
- * Temperature range: -25°C~+85°C
- * Insulation resistance: 1,000M Ω min.
- * Withstand voltage: 1,000AC/minute

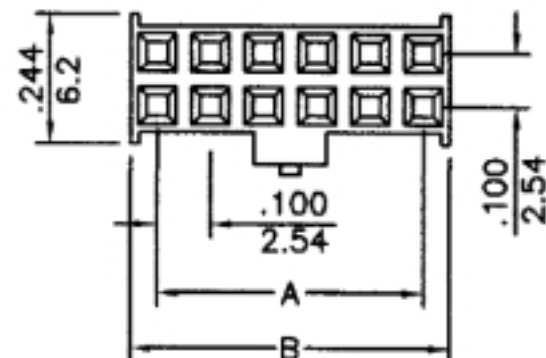

CIRCUITS	DIMENSION in.(mm)		CIRCUITS	DIMENSION in.(mm)	
	A	B		A	B
6	0.200(5.08)	0.300(7.62)	22	1.000(25.40)	1.100(27.94)
8	0.300(7.62)	0.400(10.16)	24	1.100(27.94)	1.200(30.48)
10	0.400(10.16)	0.500(12.70)	26	1.200(30.48)	1.300(33.02)
12	0.500(12.70)	0.600(15.24)	28	1.300(33.02)	1.400(35.56)
14	0.600(15.24)	0.700(17.78)	30	1.400(35.56)	1.500(38.10)
16	0.700(17.78)	0.800(20.32)	32	1.500(38.10)	1.600(40.64)
18	0.800(20.32)	0.900(22.86)	34	1.600(40.64)	1.700(43.18)
20	0.900(22.86)	1.000(25.40)	36	1.700(43.18)	1.800(45.72)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$



ORDER INFORMATION

MCT-H-2Xxx-LF
SERIES | LEADFREE
2X03:6PIN
2X18:36PIN
HOUSING

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: