

SPECIFICATIONS

Current rating : 2A AC,DC

Voltage rating : 250V AC,DC


Temperature range : -25°C to +85 °C

Contact resistance : 20mΩ Max.

Insulation resistance : 1000MΩ Min.

Withstanding voltage : 800V AC/minute

Material : Nylon 66, UL94V-2

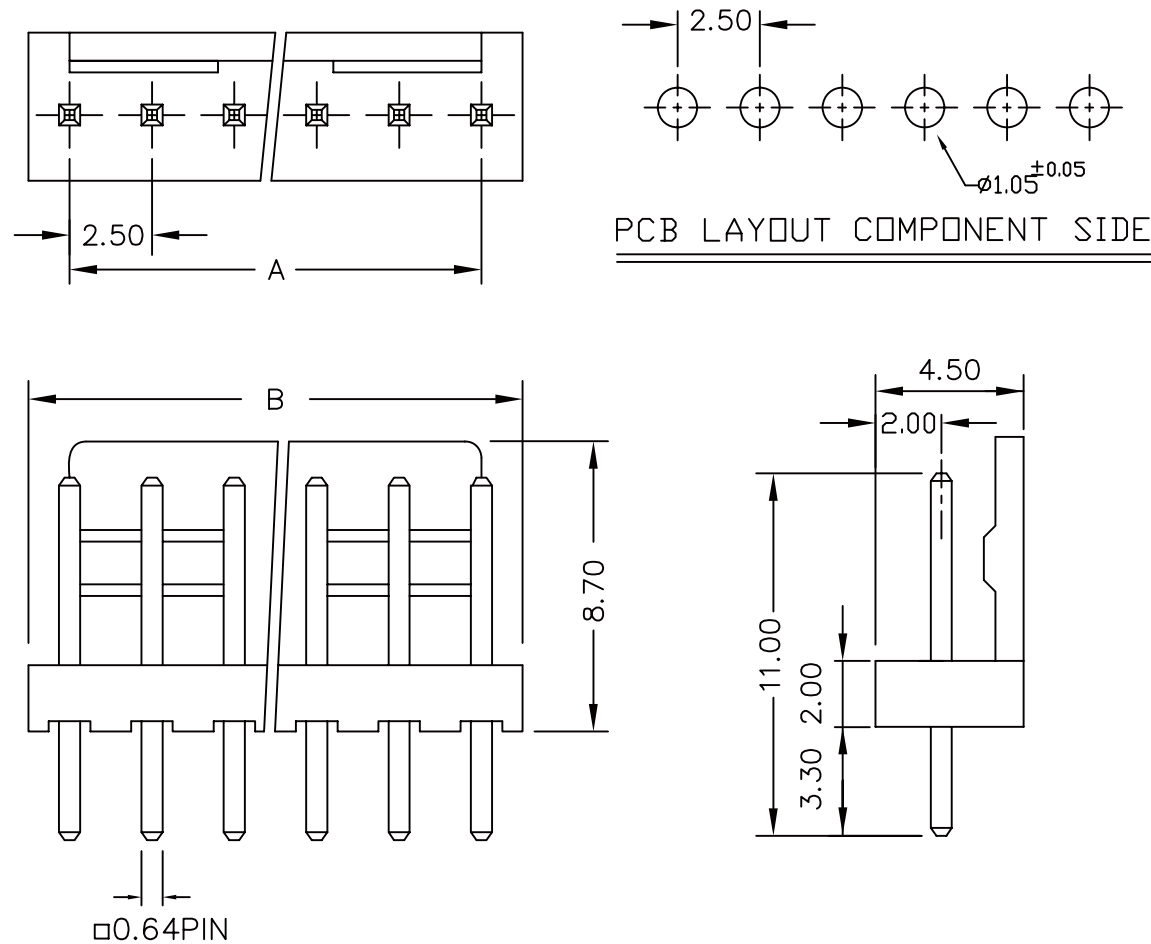

PCB LAYOUT COMPONENT SIDE

Ordering Information & Dimensions

Poles	Dimension (mm)		Part No.	Note.
	A	B		
2	2.50	5.10	RM-D-02	
3	5.00	7.60	RM-D-03	
4	7.50	10.10	RM-D-04	
5	10.00	12.60	RM-D-05	
6	12.50	15.10	RM-D-06	
7	15.00	17.60	RM-D-07	
8	17.50	20.10	RM-D-08	
9	20.00	22.60	RM-D-09	
10	22.50	25.10	RM-D-10	
11	25.00	27.60	RM-D-11	
12	27.50	30.10	RM-D-12	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

P PROJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

RM-D-xx-LF
SERIES | LEADFREE
02~12WAY
DIP 180°

DESCRIPTION: 2.5mm Wire-to-Board Header Dip 180° Type