


Features:

- 2 ~ 15 circuits available
- Material: UL 94V-0 nylon 66
- Standard color: Orange
- Recommended P.C.B. thickness: .063"(1.6mm)



2, 3



4 ~ 6



7 ~ 15

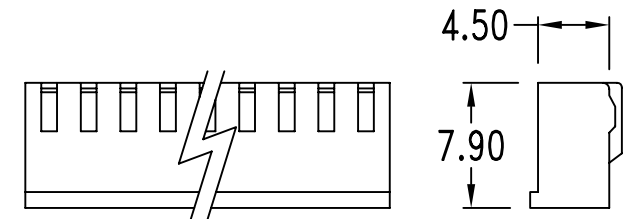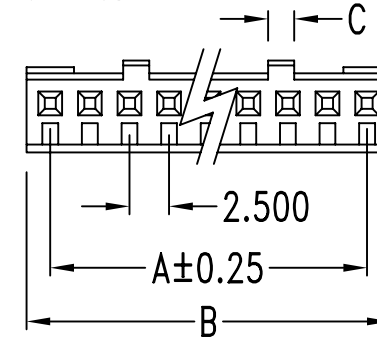

Specification:

- Current rating: 3A AC, DC
- Voltage rating: 250V AC, DC
- Insulation resistance: 1000M Ω Min.
- Dielectric withstanding voltage: 800V AC/minute
- Ambient temperature range: -25°C ~ 85°C
(including temperature rise)

Dimensional Information (mm)

Circuits	Dim. A	Dim. B	Dim. C	Circuits	Dim. A	Dim. B	Dim. C	Circuits	Dim. A	Dim. B	Dim. C
2	2.5	5.5	1.35	7	15.0	18.0	1.65	12	27.5	30.5	1.65
3	5.0	8.0	1.90	8	17.5	20.5	1.65	13	30.0	33.0	1.65
4	7.5	10.5	2.35	9	20.0	23.0	1.65	14	32.5	35.5	1.65
5	10.0	13.0	2.90	10	22.5	25.5	1.65	15	35.0	38.0	1.65
6	12.5	15.5	3.35	11	25.0	28.0	1.65				

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$



ORDER INFORMATION

ILG-H-xx-LF
SERIES | LEADFREE
02~15 WAY
HOUSING

DESCRIPTION: .098"(2.5mm) Receptacle Housing

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com