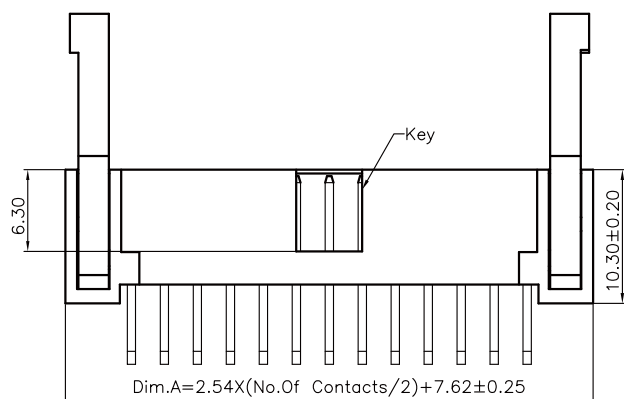

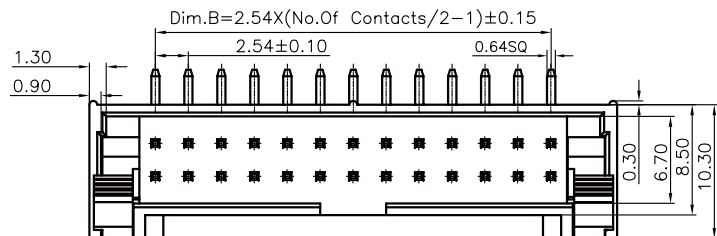


Specifications:

Current Rating:3.0A AC/DC

Voltage Rating:250 AC/DC

Contact Resistance:20m ohm. max.

Insulation Resistance:1,000M ohm. min.

Dielectric Withstanding:600V AC/Minute

Operating Temperature Range:-40°C ~ +105°C

Materials:

Insulator:High Temp. Plastic (PBT UL94V-0)


Insulator Color:Black

Contact:Brass

Plating: **gold plated**

Dimension :

Pos	Dim A	Dim B	Pos	Dim A	Dim B	Pos	Dim A	Dim B
6	15.24	5.08	16	27.94	17.78	34	50.80	40.64
8	17.78	7.62	20	33.02	22.86	40	58.42	48.26
10	20.32	10.16	24	38.10	27.94	50	71.12	60.96
12	22.86	12.70	26	40.64	30.48	60	83.82	73.66
14	25.40	15.24	30	45.72	35.56	64	88.90	78.74

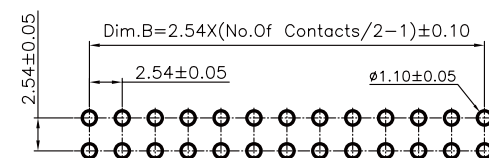

Recommended PCB Layout

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1:1


DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ± 0.20
.XX ± 0.10
.XXX ±
ANG ±

PPOJECTION



ORDER INFORMATION

FL-RSG-xx-LF
SERIES | LEADFREE
06~64WAY
FULL GOLD
SHORT/LATCH
DIP 90°

DESCRIPTION: 2.54mm Box Header Right Angle Type