
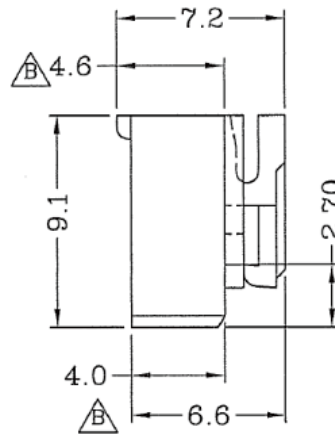
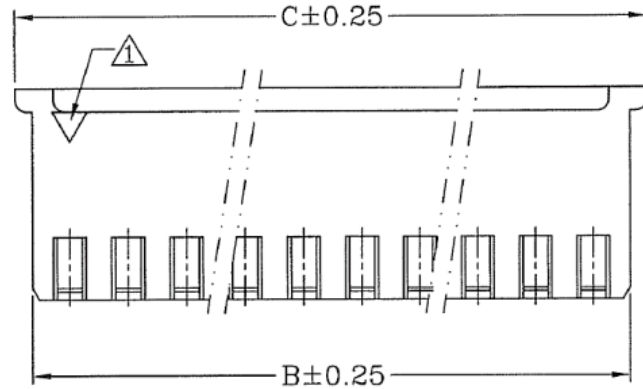


Material: Nylon 66 UL 94V-0 (White)

① Circuit No.1

② 2P~3P: No Side Poles

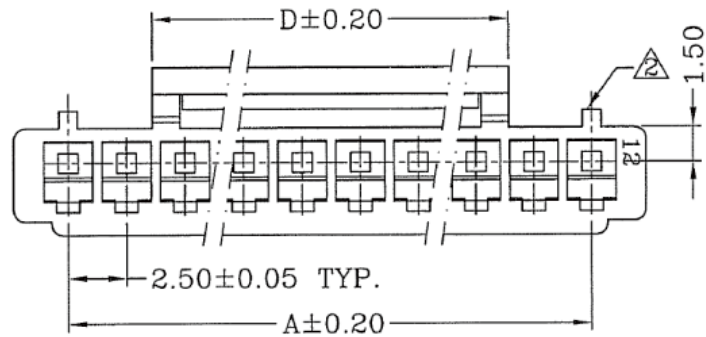

Circuits	③ Dimension				Qty/Bag
	A	B	C	D	
2	2.50	5.6	7.2	3.0	1000
3	5.00	8.2	9.7	3.0	1000
4	7.50	10.7	12.2	5.3	1000
5	10.00	13.2	14.7	6.5	1000
6	12.50	15.7	17.2	6.5	1000
7	15.00	18.2	19.7	10.3	500
8	17.50	20.7	22.2	10.3	500
9	20.00	23.2	24.7	10.3	500
10	22.50	25.7	27.2	15.3	500
11	25.00	28.2	29.7	15.3	500
12	27.50	30.7	32.2	15.3	500
13	30.00	33.2	34.7	15.3	500
14	32.50	35.7	37.2	15.3	500
15	35.00	38.2	39.7	15.3	500

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

P PROJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

YH25-H-xx-LF
SERIES | LEADFREE
| 02~15WAY
HOUSING

DESCRIPTION: