


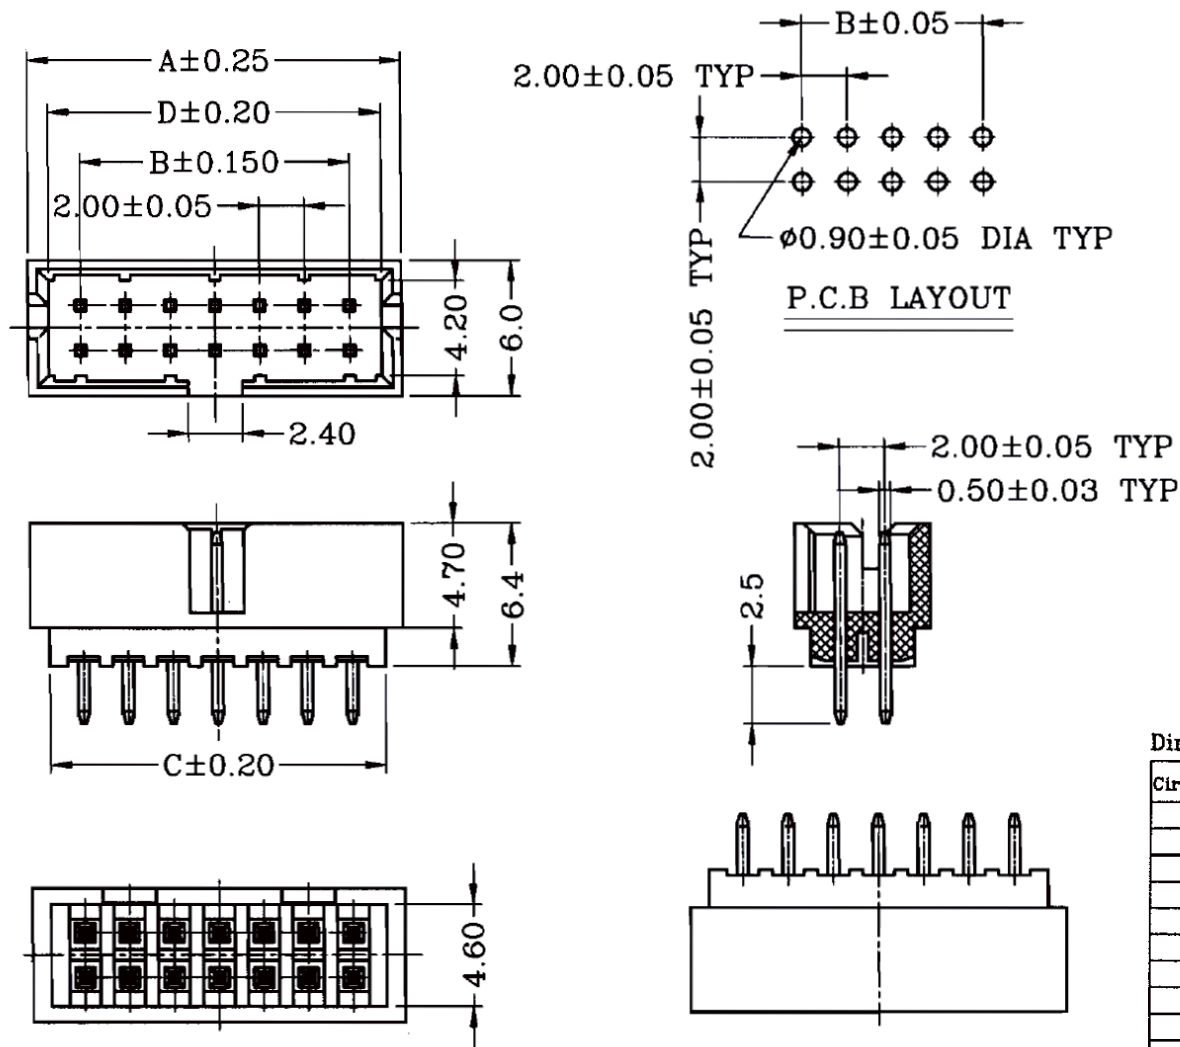

- * Material:PBT UL 94V-0 with 30%GF
- * Contact:0.50mm brass,Gold plated.

Dimensional & Ordering Information:

Circuits	Dimensions				Pcs/Bag	Circuits	Dimensions				Pcs/Bag
	A	B	C	D			A	B	C	D	
14	18.65	12.00	15.0	14.85	1000	34	36.65	32.00	35.0	34.85	500
16	18.65	14.00	17.0	16.85		36	38.65	34.00	37.0	36.85	
18	20.65	16.00	19.0	18.85		38	40.65	36.00	39.0	38.85	
20	22.65	18.00	21.0	20.85		40	42.65	38.00	41.0	40.85	
22	24.65	20.00	23.0	22.85		42	44.65	40.00	43.0	42.85	
24	26.65	22.00	25.0	24.85		44	46.65	42.00	45.0	44.85	
26	28.65	24.00	27.0	26.85		46	48.65	44.00	47.0	46.85	
28	30.65	26.00	29.0	28.85		48	50.65	46.00	49.0	48.85	
30	32.65	28.00	31.0	30.85		50	52.65	48.00	51.0	50.85	
32	34.65	30.00	33.0	32.85							

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

TOLERANCES ARE

X, ±
X, ±
.XX ±
.XXX ±
ANG ±

PPOJECTION



ORDER INFORMATION

MPVK-DA-2Xxx-LF

SERIES

LEADFREE

2X07:14WAY

2X25:50WAY

KEY WAY

DIP 180°

DESCRIPTION: