
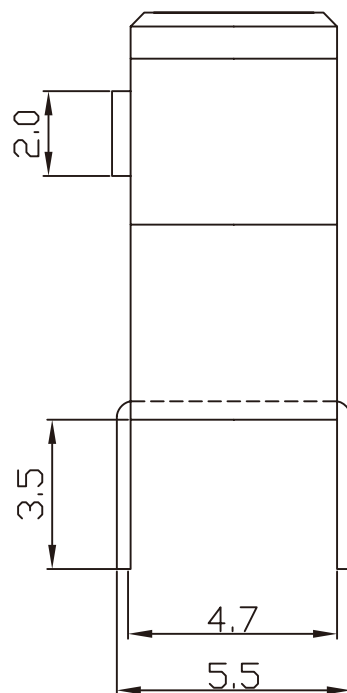


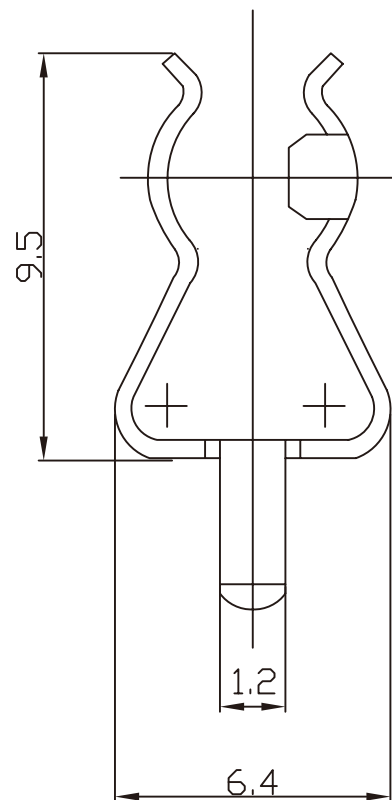

SPECIFICATION:

A=SL002



B=MATERIAL: Spring Brass

Thickness: 0.4t

C=Fuse $\varnothing 5 \times 20$ mm 250V AC 10A Max

D=Bright Tin-Plated, Nickel-Plated

E=P.C. Board Type with Fuse Stops

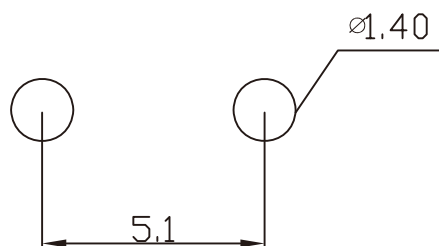

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1


DATE

SIZE A4

TOLERANCES ARE

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

P PROJECTION



ORDER INFORMATION

FSC-D-5X20-LF
SERIES LEADFREE
5X20mm
DIP 180°

DESCRIPTION: