

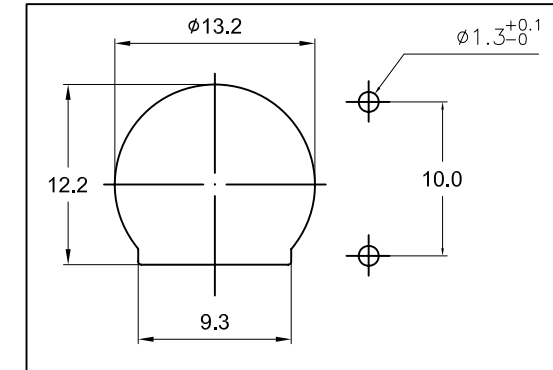
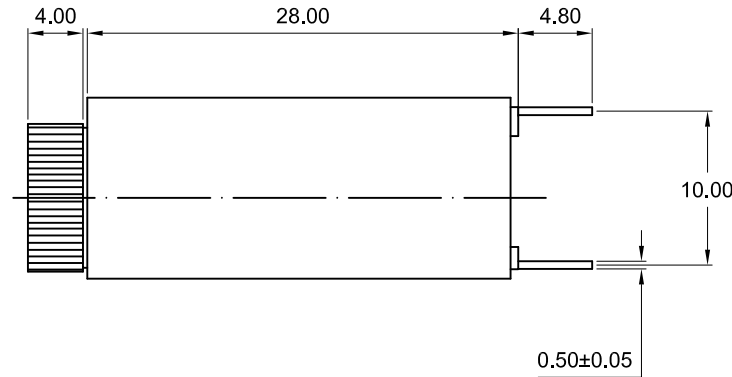
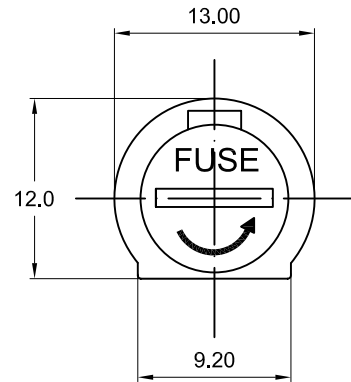


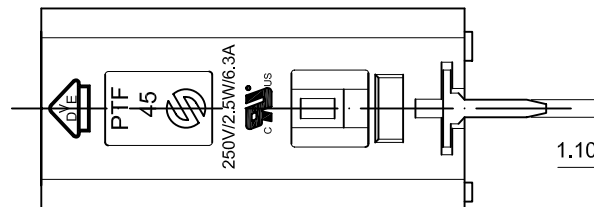

Recommend mounting holes

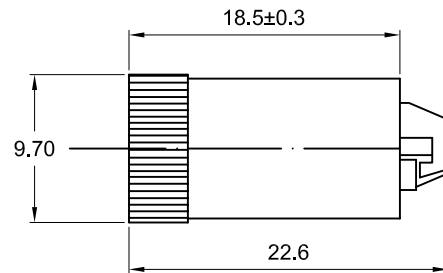

FUSE HOLDER PANEL MOUNT TYPE FOR FUSES

5.2X20mm  APPROVED

SPECIFICATIONS:

- *Rated current: 6.3A 250V
- *Insulation resistance at 500V DC: 100MΩ Min.
- *Contact resistance: 5mΩ at 1A DC
- *Dielectric strength for 60 seconds: AC 1000V min.
- *Plastic material for body and cover: PBT
- *Insulating body: Flame retarding UL94V0 thermoplastic material.
- *Contact: Nickel or tin plated copper alloy

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION 

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

FSH-U10-5X20-LF
SERIES | T | LEADFREE
| 10.0mm | 5X20mm
UPRIGHT

DESCRIPTION: