



(NO. OF CONTACTS-1)X2.54

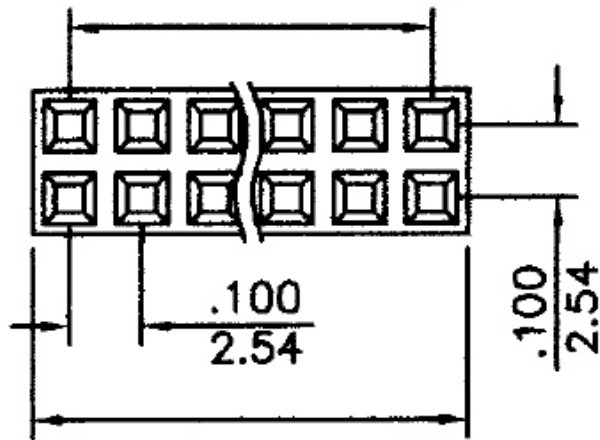

(NO. OF CONTACTS)X2.54+0.2

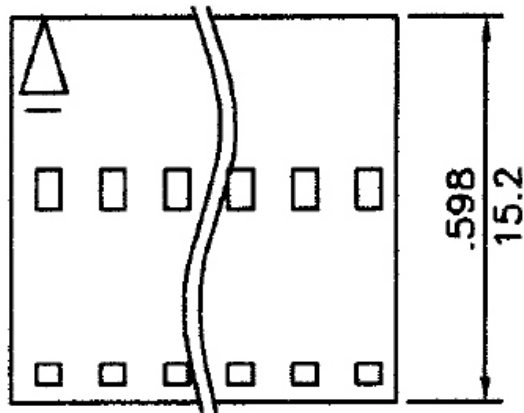

* Poles:4-80

* Material:PBTP UL94V-0,BLACK

Specifications

* Current rating: 3A AC, DC

* Voltage rating: 250V AC, DC

* Temperature range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

* Insulation resistance: $1,000\text{M } \Omega \text{ min.}$

* Withstand voltage: 1,000AC/minute

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1


DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$
ANG $\pm$



ORDER INFORMATION

MCA-H-2Xxx-LF
SERIES | LEADFREE
2X02:04WAY
2X40:80WAY
HOUSING

DESCRIPTION: