

MATERIAL

Insulator : NYLON 6T

Contact Pin : Brass Gold Flash




SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000M Ω Min. at DC 500V

Contact Resistance : 20m Ω Max. at DC 100mA

Operation Temperature : -55°C to + 105°C

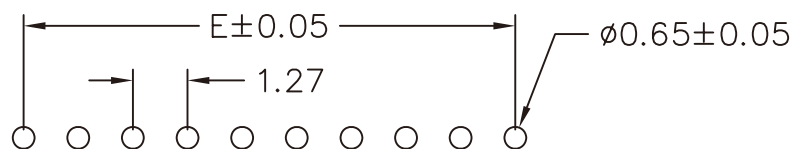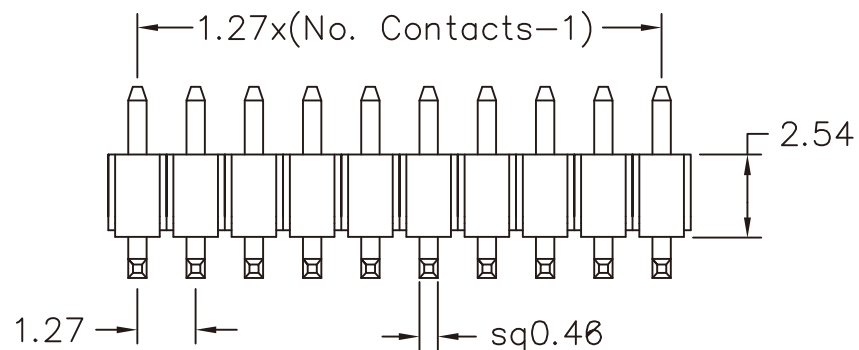

Recommended P.C.B Layout

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1


DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X. $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$
ANG $\pm$ 3°



ORDER INFORMATION

P-R2515xxyy-1Xxx-LF

SERIES	DIP 90°	DIP 20:2.0mm	LEADFREE
BASE 2.54mm	R/A 1.5mm	CONTACT 30:3.0mm	1X02:02WAY
			1X50:50WAY

DESCRIPTION: PIN HEADER 1.27*2.54mm
RIGHT ANGLE TYPE, DUAL ROWS