
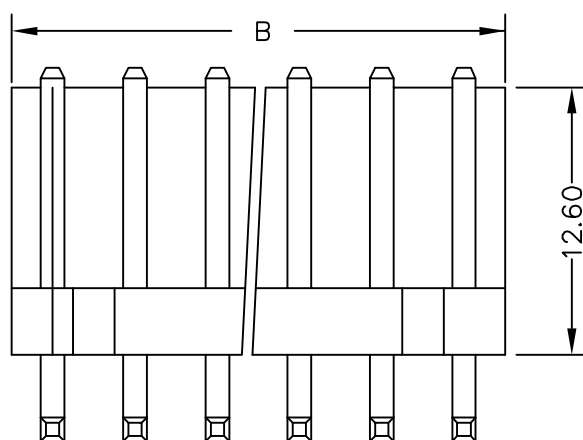
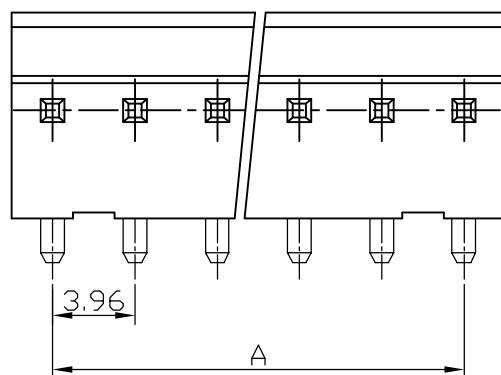


RECOMMENDED P.C.BOARD HOLE DIMM.

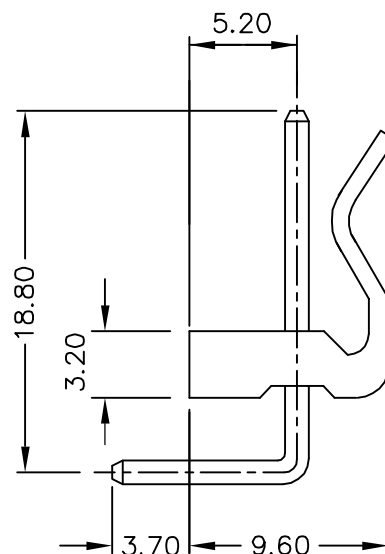

SPECIFICATIONS

Electrical

Current Rating: 7A AC, DC

Voltage Rating: 250V AC, DC

Operating Temp.: -25°C ~ +85°C

Insulation Resistance: 1000MΩ/ min.

Dielectric Withstanding Voltage: 1500V AC/ min.

Contact Resistance: 10mΩ/ max.

Material

Material: Nylon66, UL94V-2

Poles	Dimension mm (in.)		Part No.	Note.
	A	B		
2	3.96	7.92	KK-R-02	
3	7.92	11.88	KK-R-03	
4	11.88	15.84	KK-R-04	
5	15.84	19.80	KK-R-05	
6	19.80	23.76	KK-R-06	
7	23.76	27.72	KK-R-07	
8	27.72	31.68	KK-R-08	
9	31.86	35.64	KK-R-09	
10	35.64	39.60	KK-R-10	
11	39.60	43.56	KK-R-11	
12	43.56	47.52	KK-R-12	
13	47.52	51.48	KK-R-13	
14	51.48	55.44	KK-R-14	
15	55.44	59.40	KK-R-15	
16	59.40	63.36	KK-R-16	
17	63.36	67.32	KK-R-17	
18	67.32	71.28	KK-R-18	
20	75.24	79.20	KK-R-20	

註

2P-10P公差值為±0.3mm

11P-20P公差值為±0.5mm

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.30


.X ± 0.30

.XX ±

.XXX ±

ANG ±

PJECTION



ORDER INFORMATION

KK-R-xx-LF
SERIES | LEADFREE
02~20WAY
DIP 90°

DESCRIPTION: 3.96mm Wire-to-Board Header Dip 90° Type