

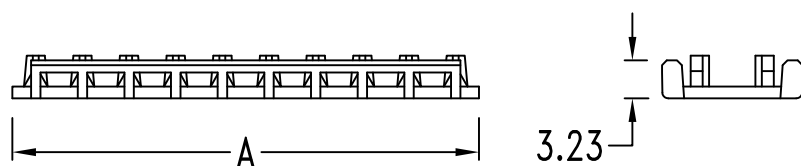
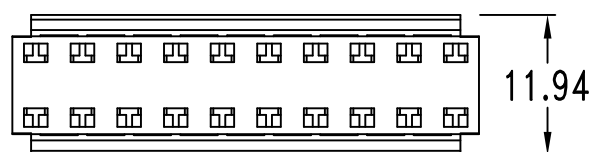


- △ • 2 ~ 20 circuits available
- Material: UL 94V-0 nylon 66
  - Color: White

KT-CC-xx

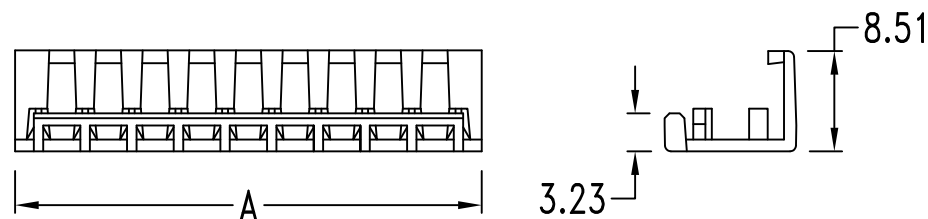

KT-CL-xx

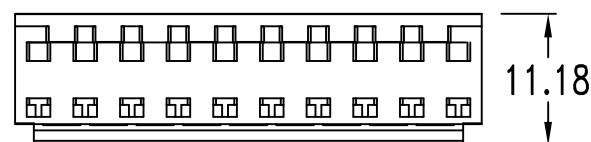

Dimensional Information - in ( mm )

| Circuits | Dim. A     | Circuits | Dim. A     | Circuits | Dim. A     | Circuits | Dim. A     | Circuits | Dim. A     |
|----------|------------|----------|------------|----------|------------|----------|------------|----------|------------|
| 2        | 7.92±0.10  | 6        | 23.76±0.20 | 10       | 39.60±0.25 | 14       | 55.44±0.30 | 18       | 71.28±0.35 |
| 3        | 11.88±0.15 | 7        | 27.72±0.20 | 11       | 43.56±0.25 | 15       | 59.40±0.30 | 19       | 75.24±0.35 |
| 4        | 15.84±0.15 | 8        | 31.68±0.20 | 12       | 47.52±0.25 | 16       | 63.36±0.30 | 20       | 79.20±0.35 |
| 5        | 19.80±0.15 | 9        | 35.64±0.20 | 13       | 51.48±0.30 | 17       | 67.32±0.30 |          |            |

△

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±


.X ± 0.40

.XX ± 0.25

.XXX ± 0.08

ANG ±

PPOJECTION



ORDER INFORMATION

KT-Cx-xx-LF  
SERIES | LEADFREE  
02~20WAY  
L: CLOSED END  
C: FEED THROUGH  
COVERH

DESCRIPTION: