
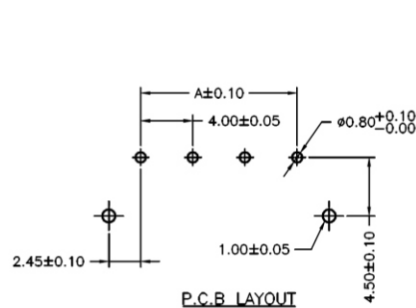


SPECIFICATIONS
 Current Rating: 1A AC,DC
 Voltage Rating: 600V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1800V AC/minute
 Pin Material: Brass/Tin-plated
 Solder Tabs: Brass/Tin-plated
 Material: Nylon 6T,UL94V-0
 Color: Natural(Beige)

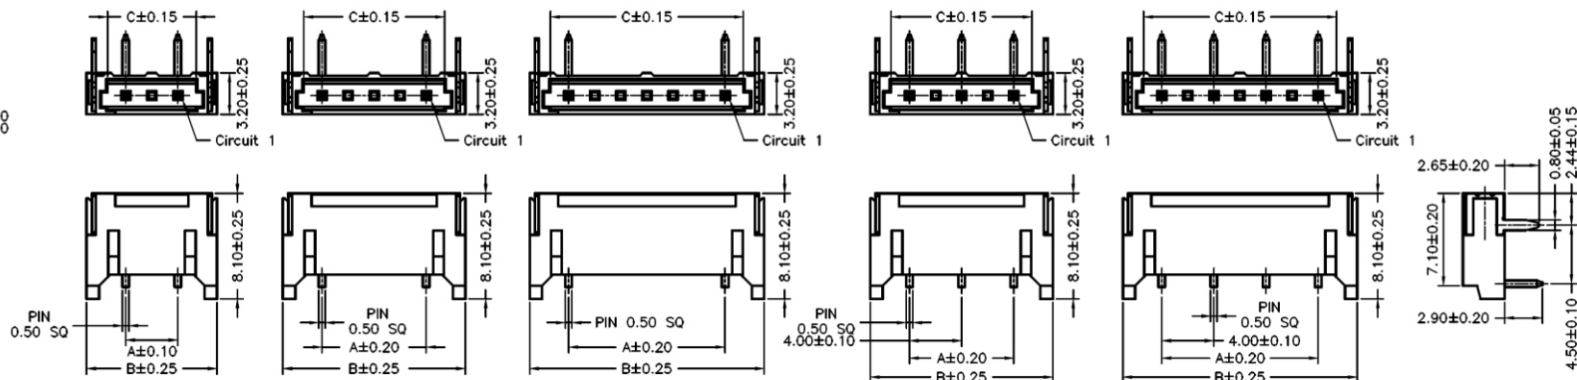


BH-R-0302

BH-R-0502

BH-R-0702

BH-R-0503

BH-R-0704

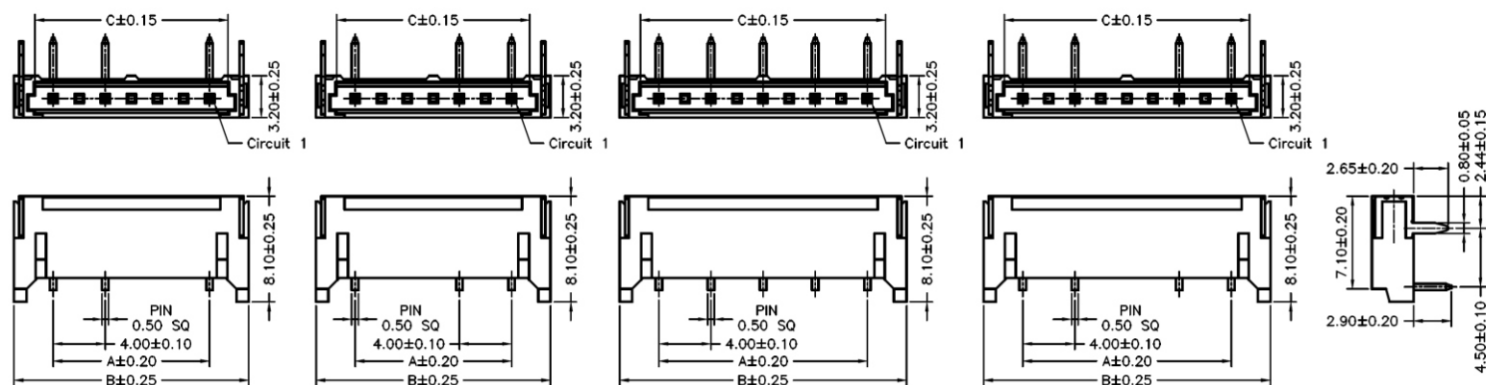

BH-R-0703EL

BH-R-0703ER

BH-R-0905

BH-R-0904

Ordering Information & Dimensions

PART NO.	Dimensions		
	A	B	C
BH-R-0302	4.00	10.00	6.80
BH-R-0502	8.00	14.00	10.80
BH-R-0702	12.00	18.00	14.80
BH-R-0503	8.00	14.00	10.80
BH-R-0704	12.00	18.00	14.80
BH-R-0703EL	12.00	18.00	14.80
BH-R-0703ER	12.00	18.00	14.80
BH-R-0905	16.00	22.00	18.80
	16.00	22.00	18.80

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
 X, ±
 .XX ±
 .XXX ±
 ANG ±

PPOJECTION



ORDER INFORMATION

BH-R-xxxx-LF
 SERIES LEADFREE
 PART NO
 DIP 90°

DESCRIPTION: