

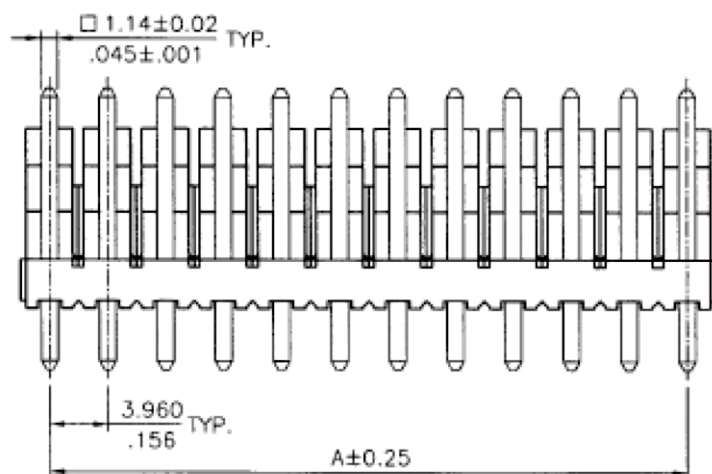


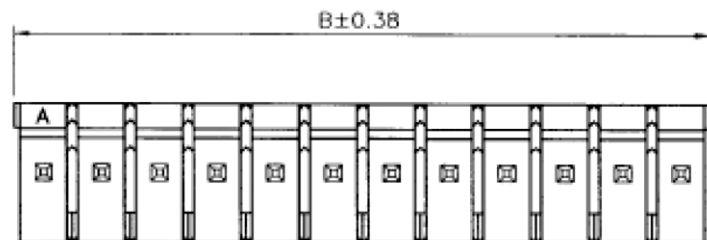

A = 3.96 x No. of Spaces

B = A + 3.96

* Available in 2 through 24 circuits

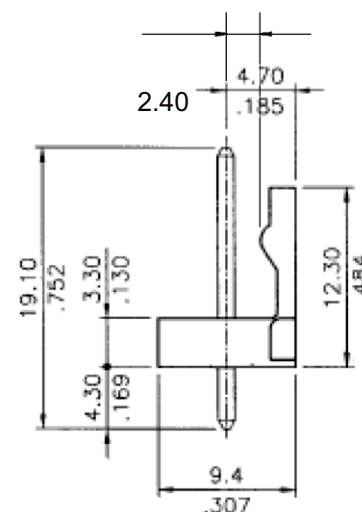


Material:

* Insulation: Glass filled polyester UL 94V-0

Color White(Nature)

* Contact: Brass

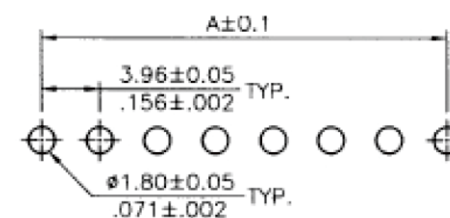

Recommended P.C. Board Layout

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X.±

.X±

.XX±

.XXX±

ANG±

PPOJECTION



ORDER INFORMATION

KK-DB-xx-LF
SERIES | LEADFREE
02~24WAY
BREAKAWAY
DIP 180°

DESCRIPTION: