
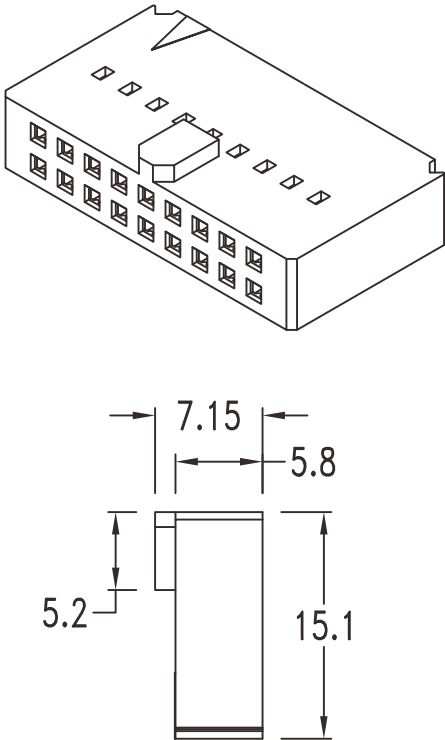


Features:

- 4 ~ 80 circuits available
- Material: P.B.T. UL 94V-0

Specification:

- Current rating: 3A
- Voltage rating: 250V AC, DC
- Insulation resistance: 1000M Ω Min.
- Dielectric withstanding voltage: 800V AC/minute
- Ambient temperature range: -25°C ~ 85°C

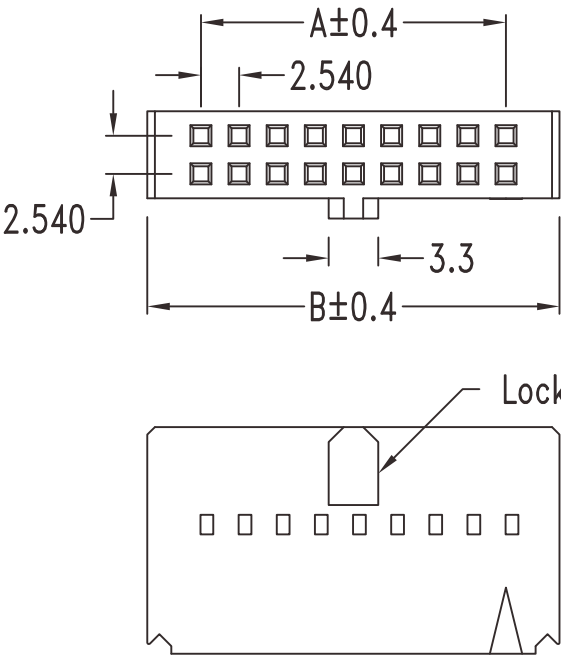

Dimensional Information (mm)

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
4	2.54	9.54	18	20.32	27.32	32	38.10	45.10	46	55.88	62.88	60	73.66	80.66	74	91.44	98.44
6	5.08	12.08	20	22.86	29.86	34	40.64	47.64	48	58.42	65.42	62	76.20	83.20	76	93.98	100.98
8	7.62	14.62	22	25.40	32.40	36	43.18	50.18	50	60.96	67.96	64	78.74	85.74	78	96.52	103.52
10	10.16	17.16	24	27.94	34.94	38	45.72	52.72	52	63.50	70.50	66	81.28	88.28	80	99.06	106.06
12	12.70	19.70	26	30.48	37.48	40	48.26	55.26	54	66.04	73.04	68	83.82	90.82			
14	15.24	22.24	28	33.02	40.02	42	50.80	57.80	56	68.58	75.58	70	86.36	93.36			
16	17.78	24.78	30	35.56	45.26	44	53.34	60.34	58	71.12	78.12	72	88.90	95.90			

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$ 0.40
.XX $\pm$ 0.25
.XXX $\pm$ 0.08
ANG $\pm$



ORDER INFORMATION

MCE-H-2Xxx-LF
SERIES | LEADFREE
2X02:04 WAY
2X40:80 WAY
HOUSING

DESCRIPTION: