


FUSE HOLDER FOR 5.2x20 mm FUSE

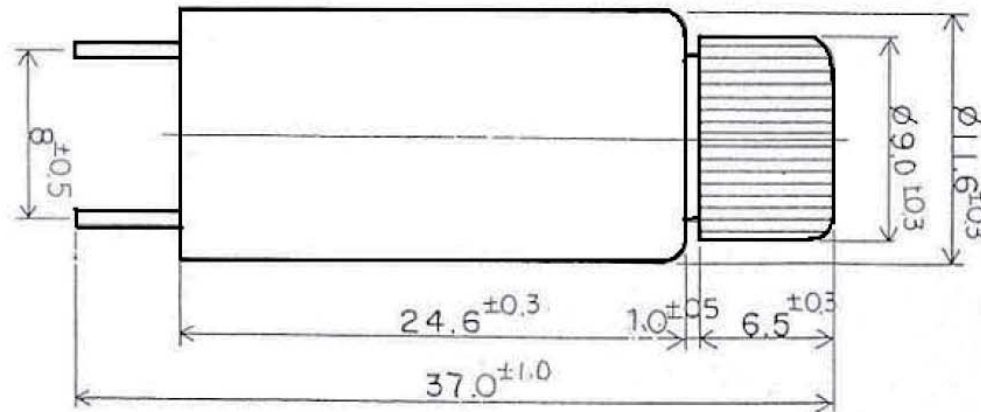

Specification :

- A > Rated Current : 10A 250V
- B > Insulation Resistance At 500V DC : 100M Ω MIN.
- C > Contact Resistance : 5m Ω At 1A DC
- D > Dielectric Strength For 60 Second : AC 1000V MIN.
- E > Bayonet Knob
- F > Approvals : UR

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
X, $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION



ORDER INFORMATION

FSH-U08-5X20-LF
SERIES | LEADFREE
5X20mm
FOOT DISTANCE 8.0mm
UPRIGHT

DESCRIPTION: