


SPECIFICATIONS
 Current Rating: 1A AC,DC
 Voltage Rating: 600V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1800V AC/minute
 Pin Material: Brass/Tin-plated
 Solder Tabs: Brass/Tin-plated
 Material: Nylon 6T,UL94V-0
 Color: Natural(Beige)

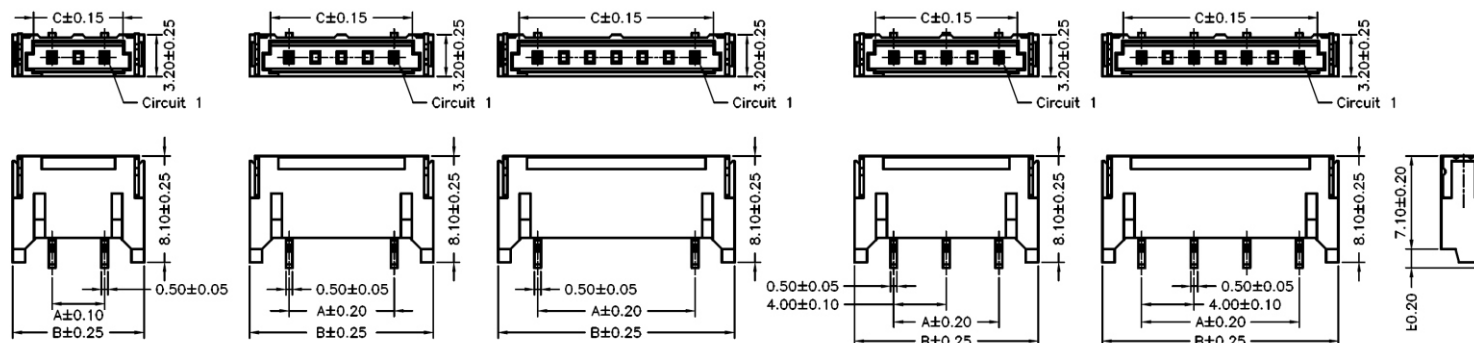


BH-WX-0302

BH-WX-0502

BH-WX-0702

BH-WX-0503

BH-WX-0704

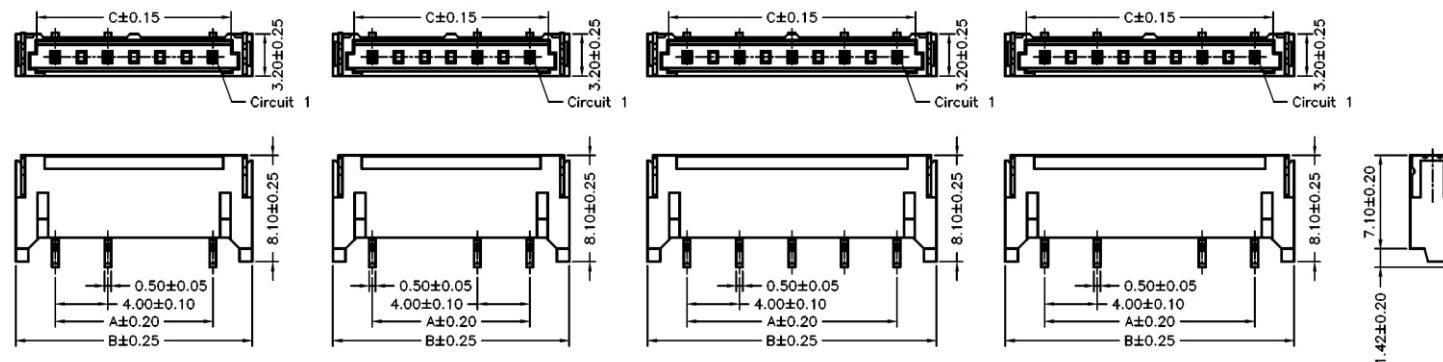

BH-WX-0703EL

BH-WX-0703ER

BH-WX-0905

BH-WX-0904

Ordering Information & Dimensions

PART NO.	Dimensions		
	A	B	C
BH-WX-0302	4.00	10.00	6.80
BH-WX-0502	8.00	14.00	10.80
BH-WX-0702	12.00	18.00	14.80
BH-WX-0503	8.00	14.00	10.80
BH-WX-0704	12.00	18.00	14.80
BH-WX-0703EL	12.00	18.00	14.80
BH-WX-0703ER	12.00	18.00	14.80
BH-WX-0905	16.00	22.00	18.80
BH-WX-0904	16.00	22.00	18.80

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±


.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION



ORDER INFORMATION

BH-WX-xxxx-LF
 SERIES | LEADFREE
 PART NO
 NON POST
 90°SMT+

DESCRIPTION: