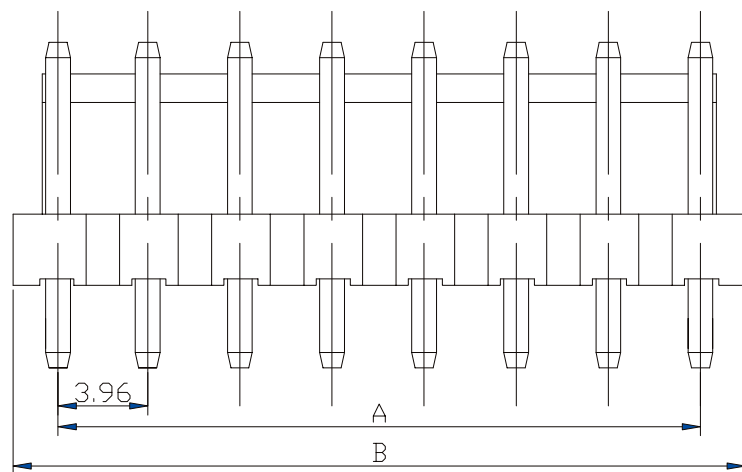
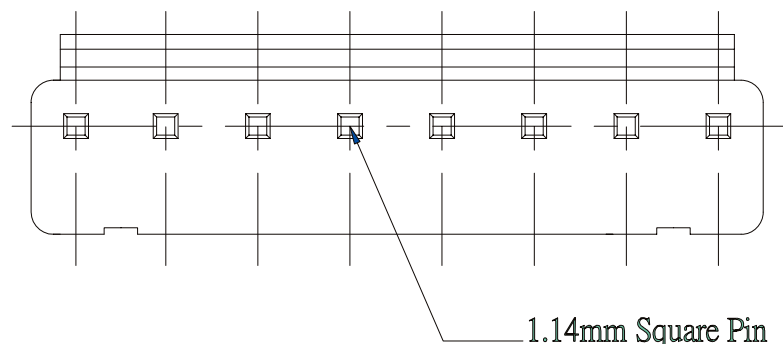


RECOMMENDED P.C.BOARD HOLE DIMM.

Specifications

Current Rating: 5A AC, DC

Voltage Rating: 250V AC Maximum


Operating Temp: -25°C ~ +85°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000mΩ Min

Terminal Material: Brass/Tin-plated

Material: Nylon 66, UL94V-0

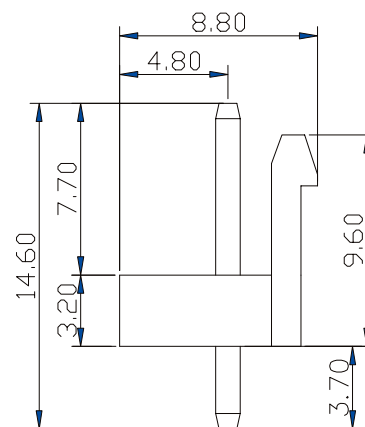

Poles	Dimension mm (in.)		Part No.
	A	B	
2	3.96 (0.156)	7.92 (0.312)	VH-D-02
3	7.92 (0.312)	11.92 (0.469)	VH-D-03
4	11.88 (0.468)	15.84 (0.624)	VH-D-04
5	15.84 (0.624)	19.84 (0.781)	VH-D-05
6	19.80 (0.780)	23.80 (0.937)	VH-D-06
7	23.76 (0.935)	27.88 (1.098)	VH-D-07
8	27.72 (1.074)	31.74 (1.250)	VH-D-08
9	31.68 (1.247)	35.86 (1.412)	VH-D-09
10	35.64 (1.403)	39.90 (1.571)	VH-D-10
11	39.60 (1.559)	43.84 (1.726)	VH-D-11
12	43.56 (1.715)	47.92 (1.887)	VH-D-12
13	47.52 (1.871)	51.72 (2.036)	VH-D-13
14	51.48 (2.027)	55.92 (2.202)	VH-D-14

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

VH-D-xx-LF
SERIES | LEADFREE
02~14WAY
DIP 180°

DESCRIPTION: 3.96mm Wire-to-Board Header DIP 180° Type