
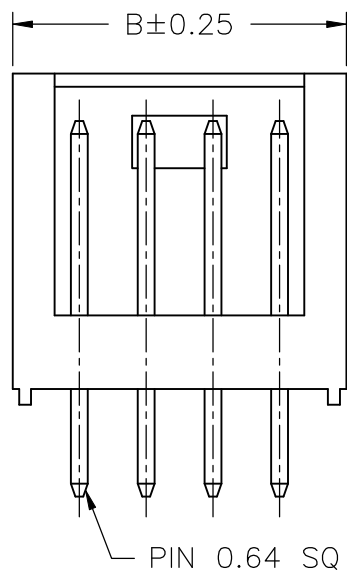
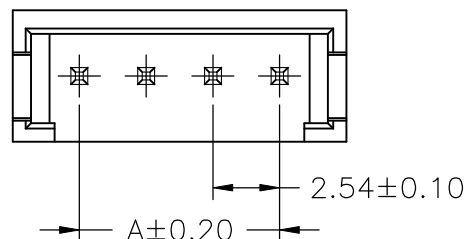
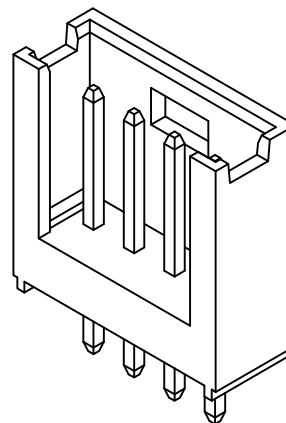


P.C.B LAYOUT

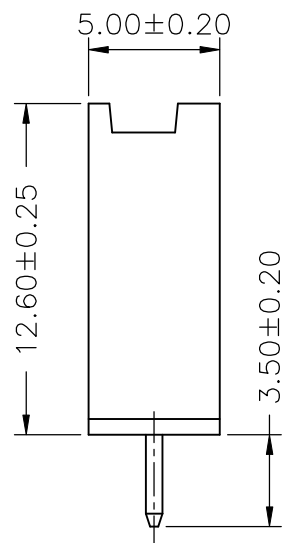

SPECIFICATIONS

Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1000V AC/minute
 Pin Material: Brass/Tin-plated
 Material: PBT or Nylon 6T,UL94V-0

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
MOD-D-1X02	2.54	7.70
MOD-D-1X04	7.62	12.70
MOD-D-1X06	12.70	17.80
MOD-D-1X08	17.78	22.90
MOD-D-1X09	20.32	25.40
MOD-D-1X10	22.86	28.00
MOD-D-1X12	27.94	33.10
MOD-D-1X15	35.56	40.70
MOD-D-1X22	53.34	58.50

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES
 煜倫股份有限公司

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

MOD-D-1Xxx-LF
 SERIES LEADFREE
 1X02:02WAY
 1X22:22WAY
 DIP 180°

DESCRIPTION: 2.54mm PITCH 180° WAFER

www.morethanall.com