


Pcs/1bag  
1000

ML-S-1X01

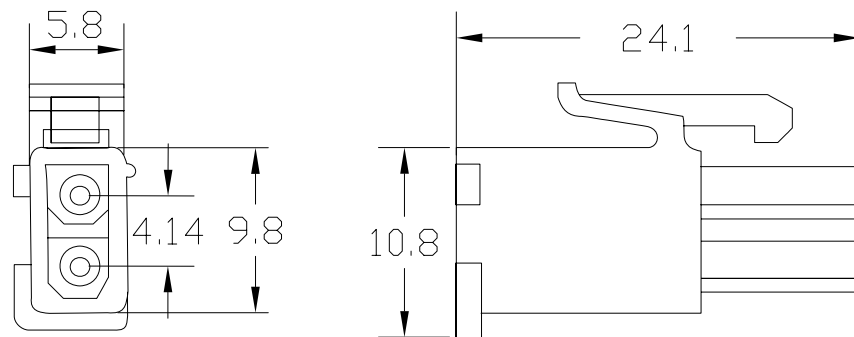


Pcs/1bag  
1000

ML-S-1X02

SPECIFICATIONS

Voltage rating:300V AC,DC  
 Current rating:5A AC,DC  
 Withstanding voltage:1500V AC/minute  
 Insulation resistance:1000MΩHM min  
 Temperature range:-25°C~+90°C  
 Material:UL94V-2 Nylon 66

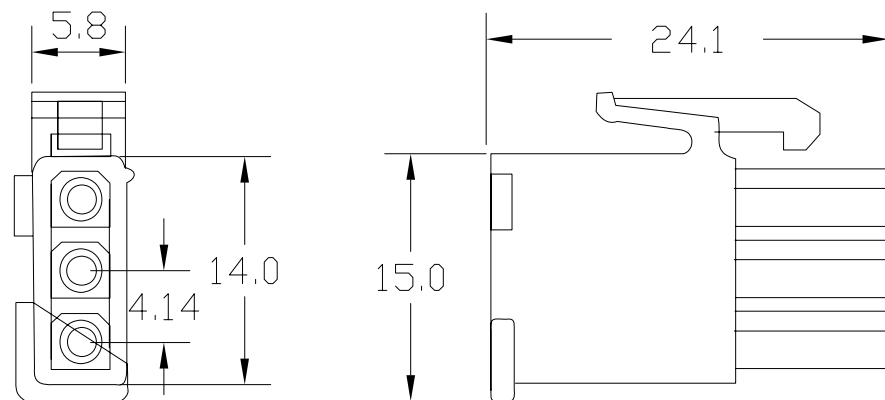

Pcs/1bag  
1000

ML-S-1X03


**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES  
 煜倫股份有限公司

DRAWING BY CY  
 CHECKED BY GENIUS  
 UNIT/mm SCALE 1:1  
 DATE

X.±  
 .X±  
 .XX±  
 .XXX±  
 ANG±



**ORDER INFORMATION**

**ML-S-1Xxx-LF**  
 SERIES | LEADFREE  
 1X01:01 WAY  
 1X03:03 WAY  
 FEMALE HOUSING

www.morethanall.com

SIZE A4 PROJECTION

DESCRIPTION: