

• MATERIALS:(RoHS Compliant)

Housing And Cover : Plastic Thermoplastic
P.B.T UL94V-0 Black

Contacts : Phosphor Bronze Gold
Selective Plated

• ELECTRICAL CHARACTERISTICS:



Contact Current Rating: 1 Amp

Dielectric Withstanding Voltage: 500V AC







Insulation Resistance: >500MΩ/Min

Contact Resistance: 35mΩ/Max



Operation Temperature: -55°C ~ +105°C

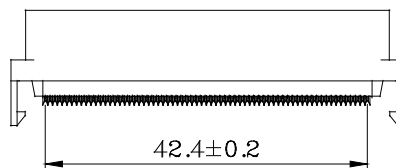

Cover

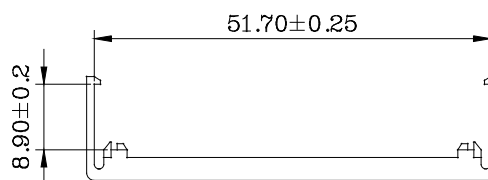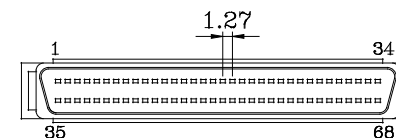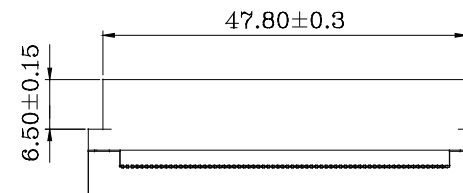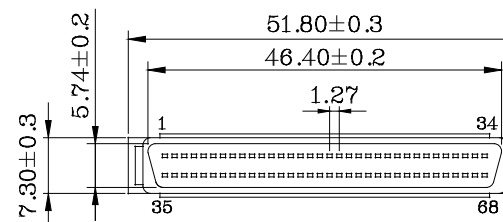

Strain Relief

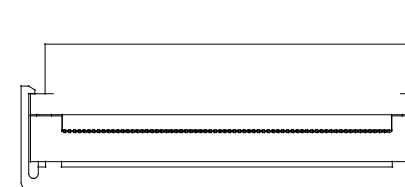

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±


.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION



ORDER INFORMATION

HPDP-PFS3-068-LF

SERIES

LEADFREE

68WAY

THREE TYPE

IDC 0.635mm

MALE

DESCRIPTION: 1.27mm (.050") Pin Type 68Pos
Plug Connector For 0.635(.025") Flat Ribbon Cable(Unshielded)