


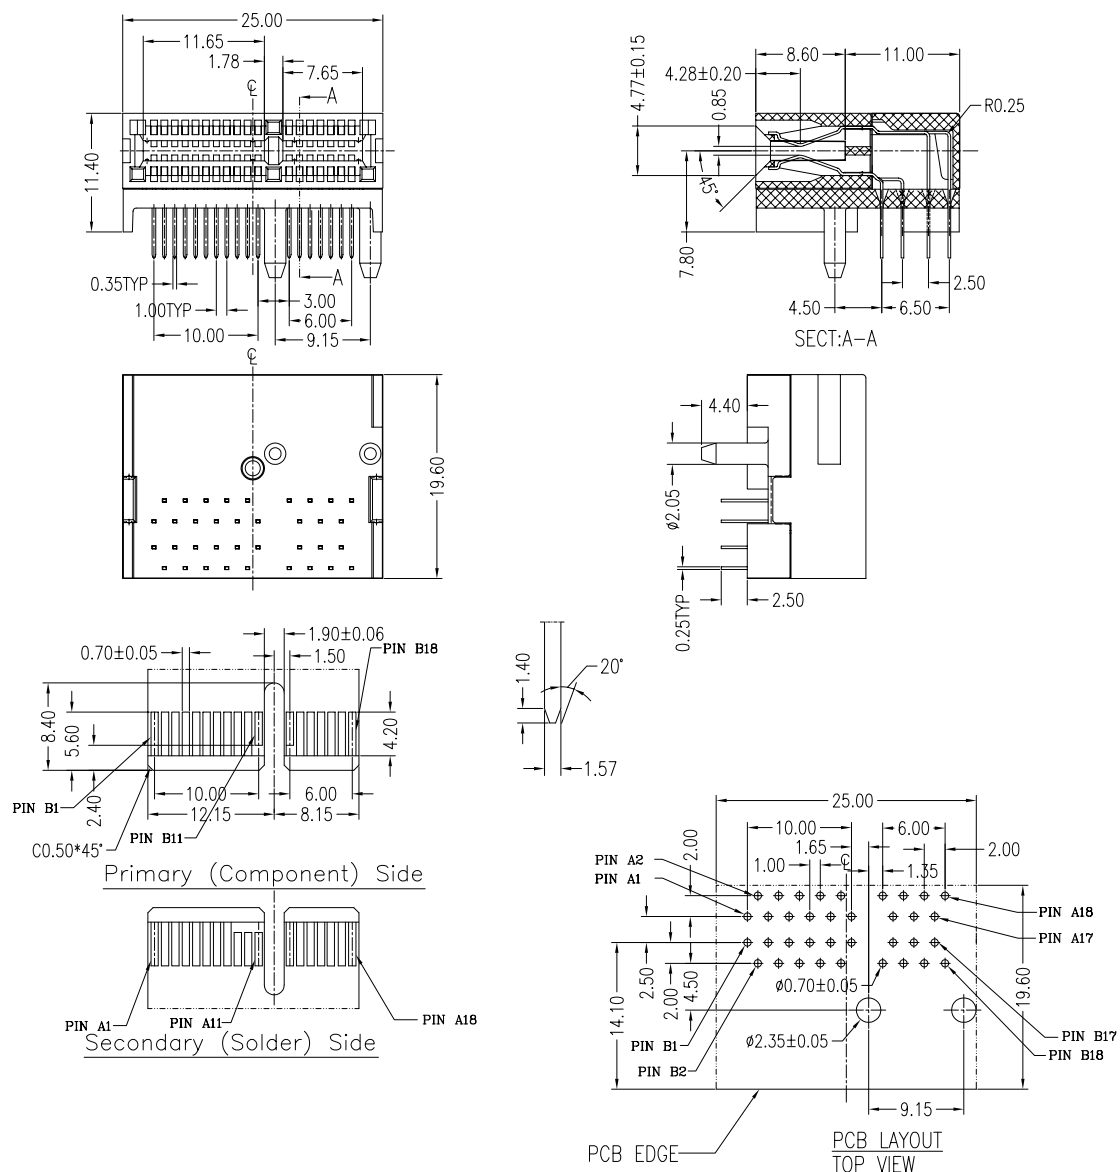

NOTES:

*Material

Housing: Nylon46+30%G.F, UL 94V-0 Rated. Color: Black
Contact: Brass.
Plating: Gold plating over Nickel on contact Area; Tin plating on solder tail.

*Mechanical


Insertion Force: 1.15N max per contact pair;
Withdrawal Force: 0.15N min per contact pair;
Contact Retention Force: 4.9N min per contact;

*Electrical Specification

Contact Resistance : 30 Milliohms Max.
Current Resistance : 1.1 Ampere
Insulation Resistance : 1000 Megohms Min, At 500V AC.

*Environmental

Operating Temperature : -55°C to +105°C



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.20
ANG ± 3°



ORDER INFORMATION

PCIX-R-036L-LF
SERIES | LEADFREE
LEFT KEY
36 WAY
DIP 90°

DESCRIPTION: PCI Express R/A DIP Type Add Height 36P(left key) CRT