


BACK SHELL

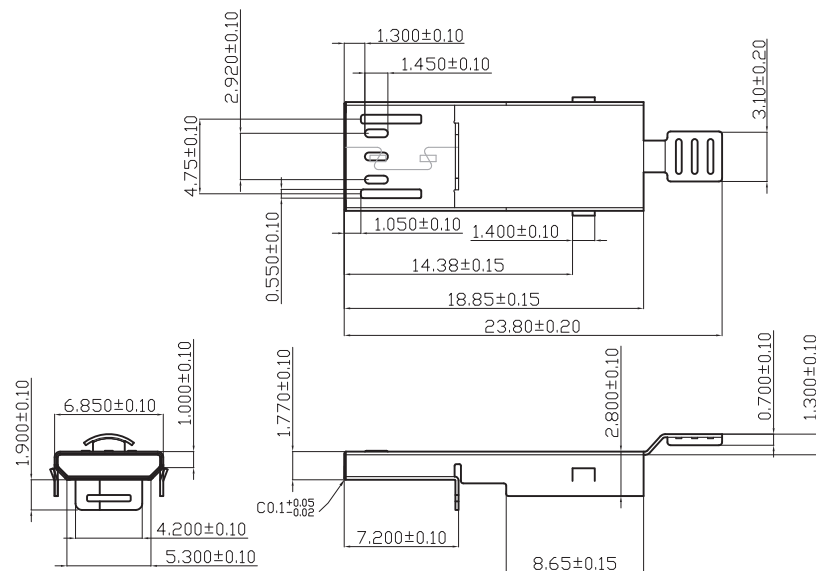

FRONT SHELL

Note:

1.Material:

- 1.1 Housing: LCP UL 94-V0 rated.
- 1.2 Contact: Phosphor Bronze, t=0.20mm.
- 1.3 Front Shell: Stainless steel, t=0.20mm.
- 1.4 Back Shell: Stainless steel, t=0.20mm.
- 1.5 卡钩: Stainless steel, t=0.40mm.

2.specification:

- 2.1 Current rating:1A MAX.
- 2.2 Dielectric withstanding voltage:500 v(ac) far minuta.
- 2.3 Contact resistance: 30 mΩ max.
- 2.4 Insulation resistance: 1000 MΩ min at DC 500V.
- 2.5 Temperature range: -55°C~+105°C.

3.Finishes:

- 3.1 Contacts: Gold flashed, 1u",3u",5u",15u", 30u".on Contact area .
100u"-120u" Tin. Plating on soldertails.
50u"-80u" Nickel .underplating over all

3	卡勾	2	Stainless steel	T=0.40±0.01mm	
5	BACK SHELL	1	Stainless steel	T=0.20±0.01mm	
4	FRONT SHELL	1	Stainless steel	T=0.20±0.01mm	
2	CONTACT	5	Phosphor Bronze	T=0.20±0.01mm	Gold flashed
1	HOUSING	2	LCP		Black
No.	Part Name	Q'ty	Material	Thickness	Finish

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm


SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 1°



ORDER INFORMATION

MISB-PS-5B-LF
SERIES
LEADFREE
5 PIN B TYPE
SOLDER
MALE

DESCRIPTION: MICRO USB 5P B MALE SOLDER