

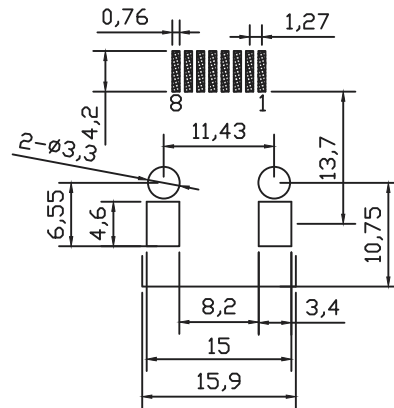




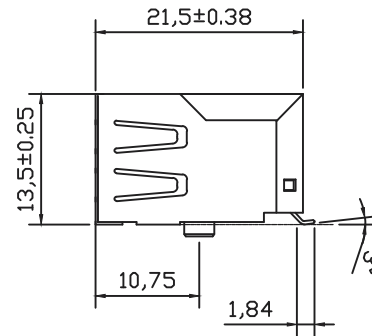

PCB Layout



NOTE:

- 1.Shielded - 0.20mm THICKNESS BRASS C2680 H.
PLATING NICKEL 30u"-50u".
- 2.Housing- Standard Material LCP,Glass Filled
Polyester UL94V-0 Standed Color Black.
- 3.RJ Terminal- Plastic:LCP, UL94V-0,Standard Color Black.
Pin:0.35mm Thickness Phos-Bronze C5210 EH.
Plating:Nickel40u"~60u" for all and Sn 100%
,and Gold Plating.
- 4.Input Terminal- LCP,Glass Filled,UL94V-0,
Standard Color Black.
Pin:0.35mm Thickness Phos-Bronze C2680.
Plating:Nickel40u"~60u" for all and Sn 100%.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.38
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION



ORDER INFORMATION

MJWF13T47U-KS06NP2-0808-LF

SERIES

BLACK

06u" GOLD

SPRING


POST

INNER EAR

8P8C

LEADFREE

DESCRIPTION:

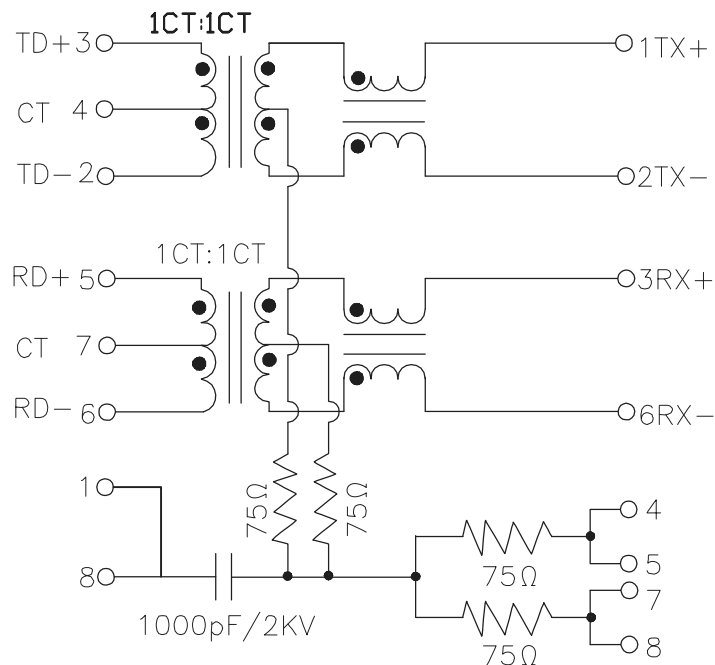

ELECTRICAL SPECIFICATIONS@25°C:

Turn Ratio($\sqrt{2}\%$): 1:1

INSERTION LOSS (1–100MHz): –1.0dB MAX.

Return Loss (dB MIN): –18dB(1–30MHz)
–[18–20LOG(F/30MHz)]dB (30–60MHz), –12dB(60–80MHz)

Cross talk (dB MIN): –50dB(0.5–1MHz), –50dB(10MHz)
–40dB (30MHz), –35dB (50MHz), –30dB (100MHz)

CMR(dB MIN): –50dB(0.3–1MHz), –47dB(10MHz)
–42dB (30MHz), –37dB (60MHz), –30dB (100MHz)

CDMR(dB MIN): –50dB(0.3–1MHz), –50dB(10MHz)
–50dB (30MHz), –45dB (60MHz), –40dB (100MHz)

HI–POT TEST: 1500Vrms/0.5mA/2Sec.

PRIMARY INDUCTANCE: 350uH MIN @100KHz/0.1V, 8mA
D.C.BIAS

RoHS compliance: YES

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.38
.XX ± 0.20
.XXX ± 0.10
ANG ±



ORDER INFORMATION

MJWF13T47U-KS06NP2-0808-LF

SERIES

BLACK 06u" SPRING
POST INNER EAR
8P8C

LEADFREE

DESCRIPTION: