

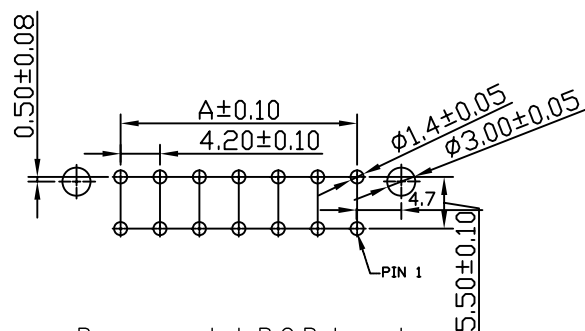
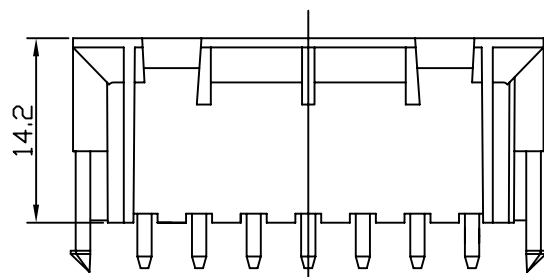


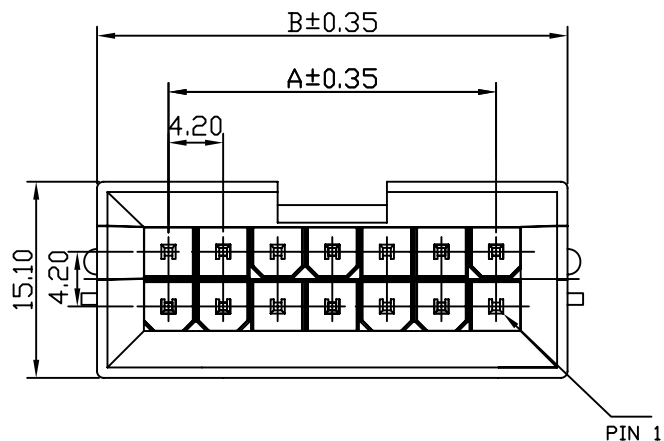

Recommended P.C.B Layout

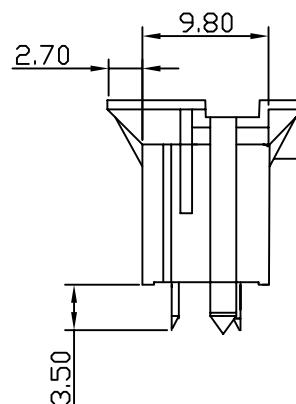

SPECIFICATIONS

Current Rating: 5A AC, DC
 Voltage Rating: 600V AC,DC
 Operating Temp.: -25°C ~ +85°C
 Insulation Resistance: 1000MΩ/ min.
 Dielectric Withstanding Voltage: 1500V AC/ min.
 Contact Resistance:10mΩ/ max.

Material

Terminal Material: Brass/Tin-Plated
 Material: Nylon 66, UL94V-0

Poles	Dimension mm		Part No.
	A	B	
4	4.20	15.50	MFB-PDP-2X02
6	8.40	19.70	MFB-PDP-2X03
8	12.60	23.90	MFB-PDP-2X04
10	16.80	28.10	MFB-PDP-2X05
12	21.00	32.30	MFB-PDP-2X06
14	25.20	36.50	MFB-PDP-2X07
16	29.40	40.70	MFB-PDP-2X08
18	33.60	44.90	MFB-PDP-2X09
20	37.80	49.10	MFB-PDP-2X10
22	42.00	53.30	MFB-PDP-2X11
24	46.20	57.50	MFB-PDP-2X12

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

MFB-PDP-2Xxx-LF
 SERIES | LEADFREE
 MALE | 2X02:04WAY
 POST | 2X12:24WAY
 DIP 180°

DESCRIPTION: 4.2mm Wire-to-Board Header DIP 180° Type(BMI)