



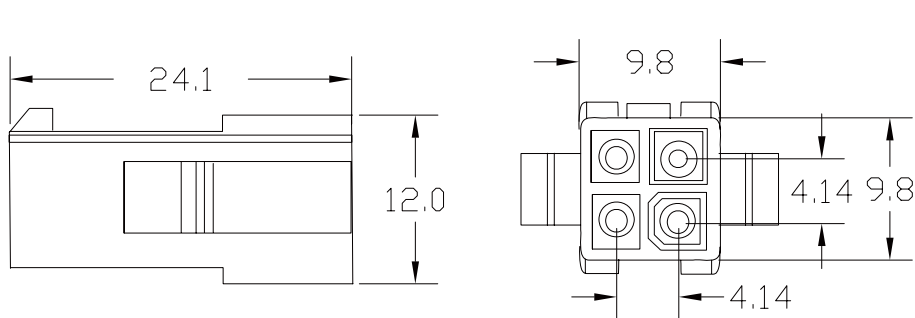


Pcs/1bag
1000

ML-PE-2X02

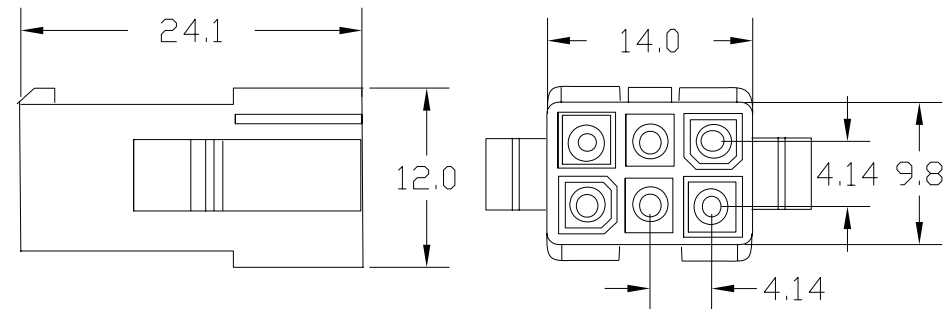


Pcs/1bag
1000

ML-PE-2X03

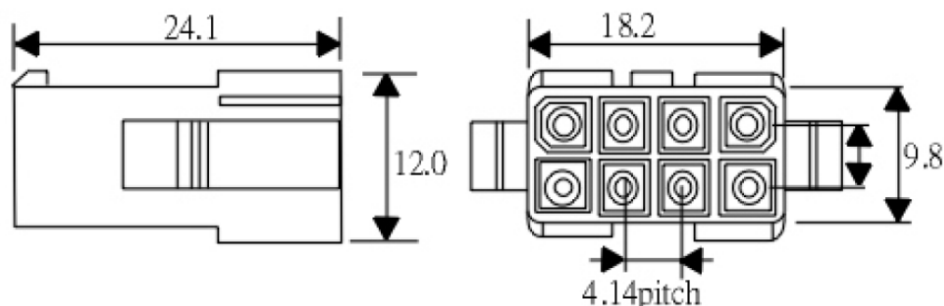

Pcs/1bag
500

ML-PE-2X04

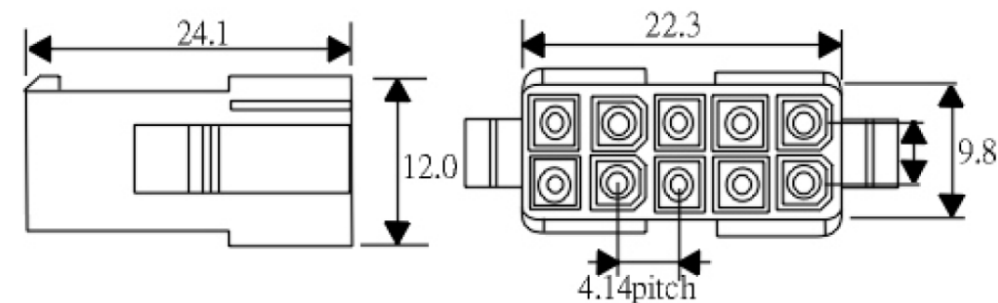

Pcs/1bag
500

ML-PE-2X05

SPECIFICATIONS

Voltage rating:300V AC,DC

Current rating:5A AC,DC

Withstanding voltage:1500V AC/minute

Insulation resistance:1000MΩHM min

Temperature range:-25°C~+90°C

Material:UL94V-2 Nylon 66

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

ML-PE-2Xxx-LF
SERIES | LEADFREE
2X02:04WAY
2X05:10WAY
EAR
MALE

DESCRIPTION: