


Specifications

1. Current Rating : 0.5A AC/DC
2. Voltage Rating : 60V AC/DC
3. Contact Resistance : 80m ohm. max.
4. Insulation Resistance : 1000M ohm. min.at 100V DC
5. Withstanding Voltage : 150V AC for one minute
6. Operating Temperature Range : -55°C to +85°C

Material and Plating

1. Housing : High Temp Plastic UL94V-0
2. Contact : Phosphor Bronze
3. Plating : Gold Plating

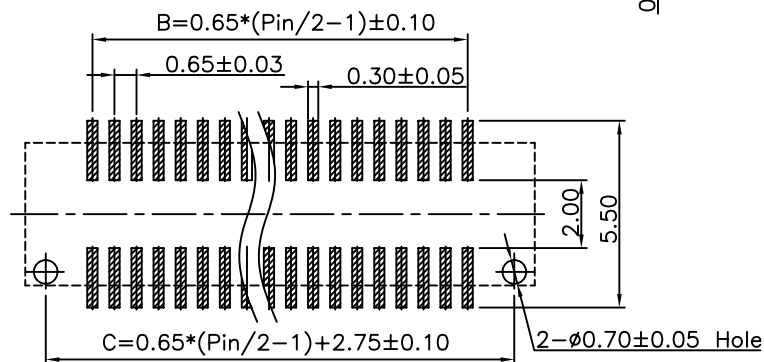

PCB LAYOUT

**Contact Dimension

Contact	DIM. A	DIM. B	DIM. C
10	6.55	2.60	5.35
20	9.80	5.85	8.60
30	13.05	9.10	11.85
40	16.30	12.35	15.10
50	19.55	15.60	18.35
52	20.20	16.25	19.00

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PJECTION

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

NP065K-P30PC-xxx-LF
 SERIES | | | LEADFREE
 | | | 010-052WAY
 MALE | | CAP
 | | POST
 UNMATED HIGH 3.0mm

DESCRIPTION: 0.65mm Board To Board 5.50mm Height Male