

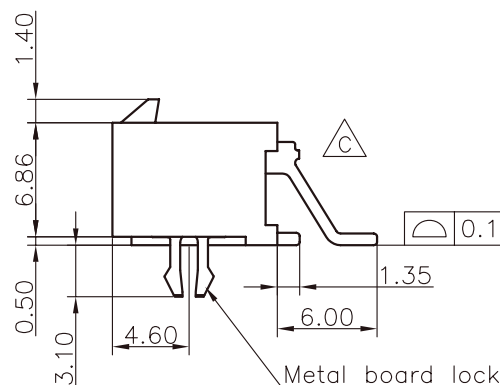
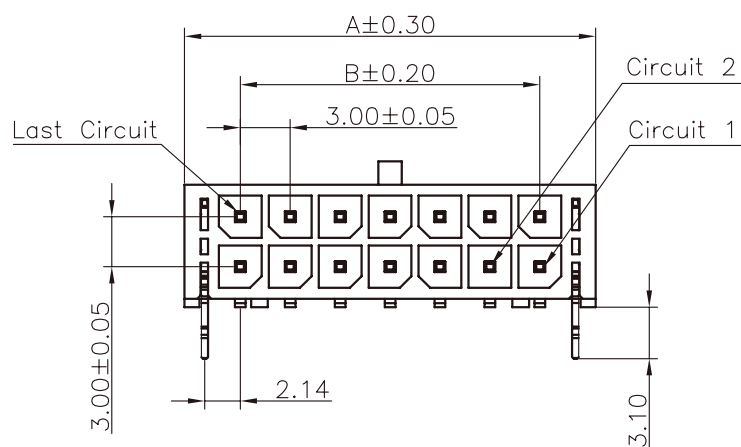



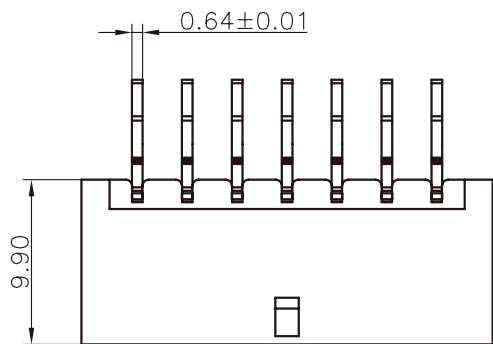

Specifications:
 Current Rating:5.0A AC/DC
 Voltage Rating:250V AC/DC
 Contact Resistance:10m ohm. Max.
 Insulation Resistance:1000M ohm. Min.
 Withstanding Voltage:1500V AC/minute
 Operating Temperature Range:-25°C ~ +105°C
 Material and Finish
 Insulator:High Temp. Plastic (Nylon 46 UL94V-0)
 Insulator Color:Black
 Contact:Copper Alloy
 Finish:Tin Plated

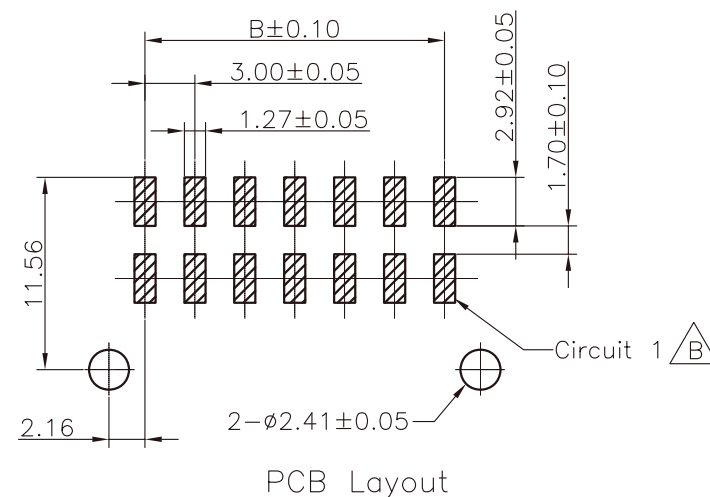

Circuits	Dimension		Circuits	Dimension	
	A	B		A	B
2	6.7	—	14	24.7	18.0
4	9.7	3.0	16	27.7	21.0
6	12.7	6.0	18	30.7	24.0
8	15.7	9.0	20	33.7	27.0
10	18.7	12.0	22	36.7	30.0
12	21.7	15.0	24	39.7	33.0

RoHS Compliant


TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES
 煜倫股份有限公司

DRAWING BY CY
 CHECKED BY GENIUS
 UNIT / mm SCALE 1 : 1
 DATE

X, ±
 .X ± 0.25
 .XX ± 0.20
 .XXX ±
 ANG ±













SIZE A4 PROJECTION



ORDER INFORMATION

MIF-PWZ-2Xxx-LF
 SERIES MALE CLIP 90°SMT
 2X02:04WAY LEADFREE
 2X12:24WAY

DESCRIPTION: 3.0mm Pitch Power Wafer SMD Type

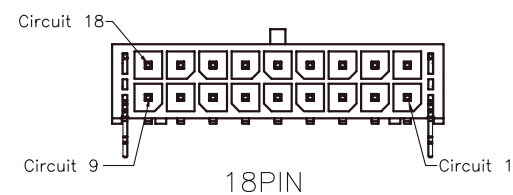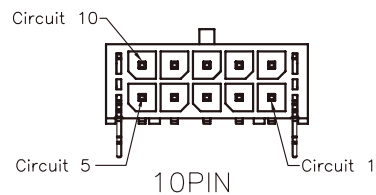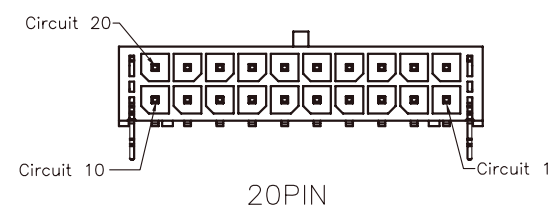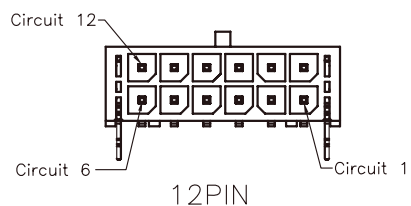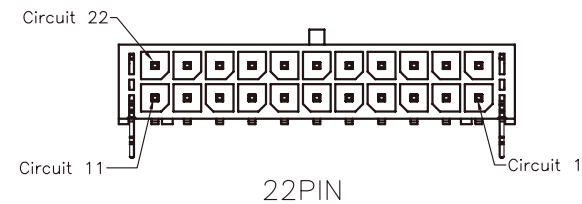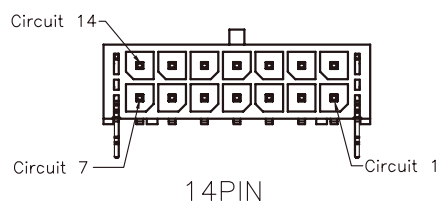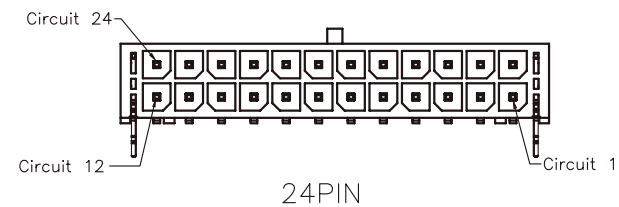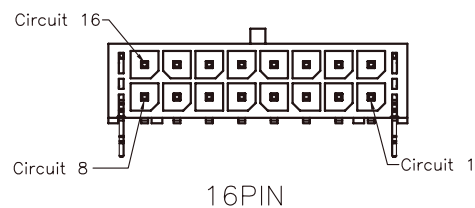

2~24P Protection Key Drawing(Ref.)

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

DATE


SIZE A4

SCALE 1:1


PPOJECTION

TOLERANCES ARE

X, ±
.X ± 0.25
.XX ± 0.20
.XXX ±
ANG ±



ORDER INFORMATION

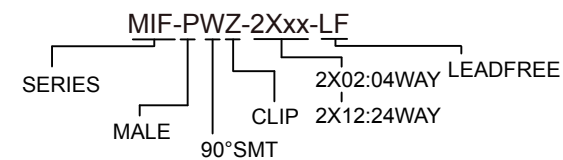

DESCRIPTION: 3.0mm Power Wafer Protection key Drawing