
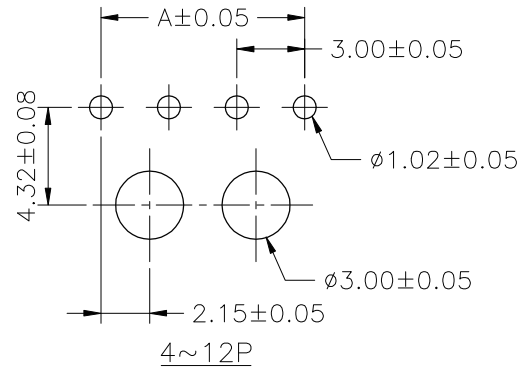




SPECIFICATIONS

Current Rating: 5A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C ~ +85°C



Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min



Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Tin-plated

Material: PBT30%GF,UL94V-0

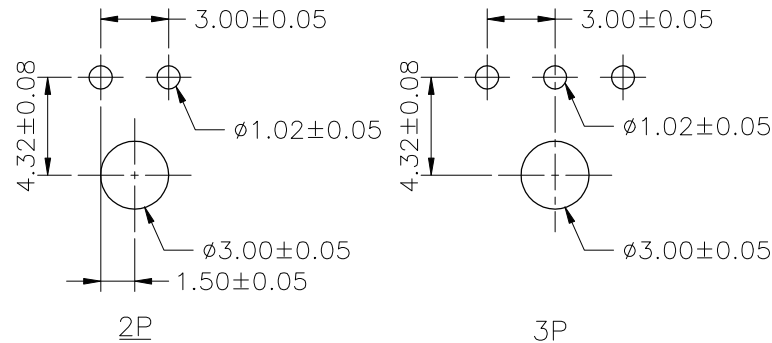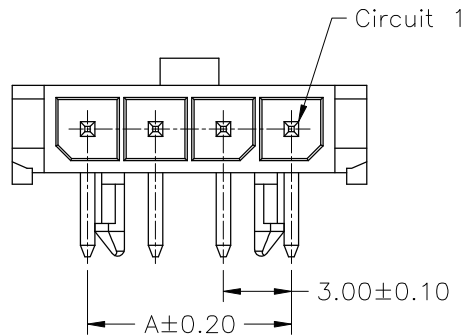

P.C.B LAYOUT

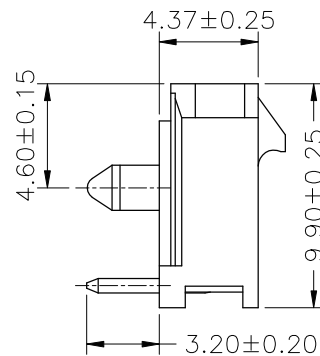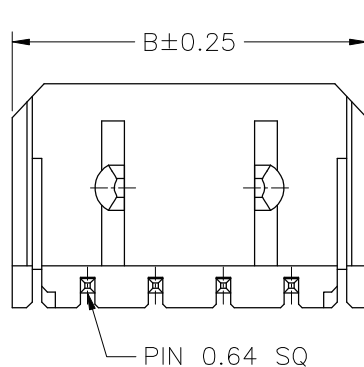

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
MIF-PRP-1X02	3.00	9.65
MIF-PRP-1X03	6.00	12.65
MIF-PRP-1X04	9.00	15.65
MIF-PRP-1X05	12.00	18.65
MIF-PRP-1X06	15.00	21.65
MIF-PRP-1X07	18.00	24.65
MIF-PRP-1X08	21.00	27.65
MIF-PRP-1X09	24.00	30.65
MIF-PRP-1X10	27.00	33.65
MIF-PRP-1X11	30.00	36.65
MIF-PRP-1X12	33.00	39.65

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1


DATE

SIZE A4


PPOJECTION

TOLERANCES ARE

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

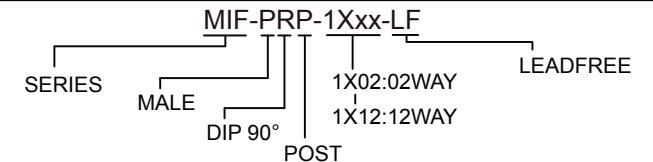

DESCRIPTION: 3.00mm PITCH 90° WAFER, SINGLE ROW, MICRO-FIT