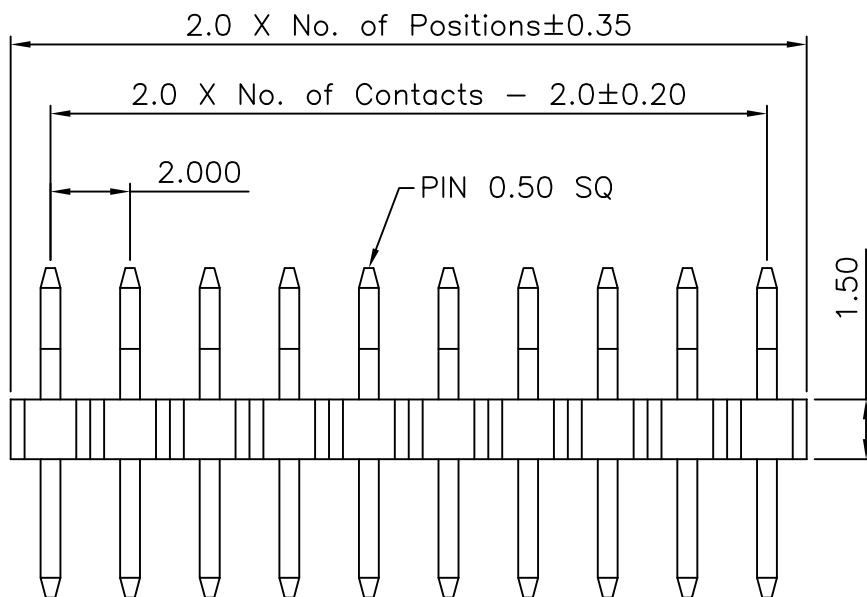


Specifications

Current Rating: 2Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 500V AC/DC



Contact Resistance: 20mΩ Max.

Operating Temperature: -40°C to +105°C

Materials

Contact Material: Copper Alloy

Insulation Material: Polyester, UL 94V-0
NYLON-6T

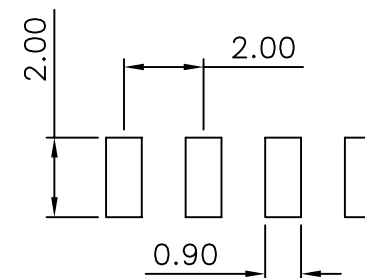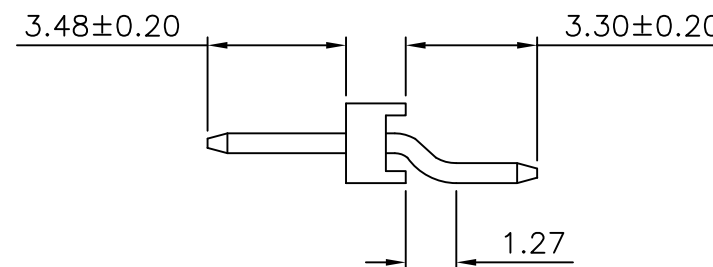

Recommended P.C.Board

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.13
ANG ±

PPOJECTION



ORDER INFORMATION

M-WX34-1Xxx-LF
SERIES | LEADFREE
1X02:02WAY
1X40:40WAY
90°SMT | CONTACT 3.48mm
NON POST

DESCRIPTION: 2.0 PIN HEADER SINGLE ROW SMT TYPE BASE 1.5H