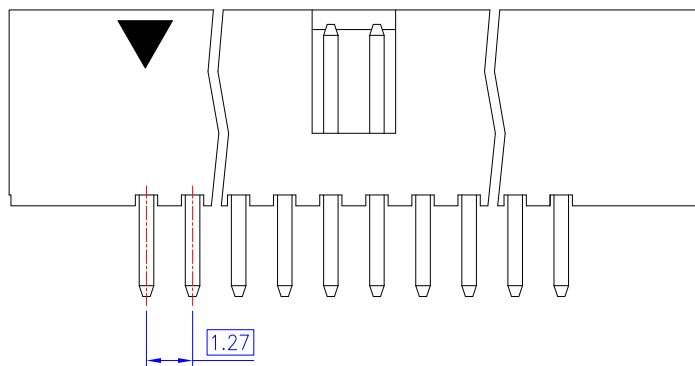
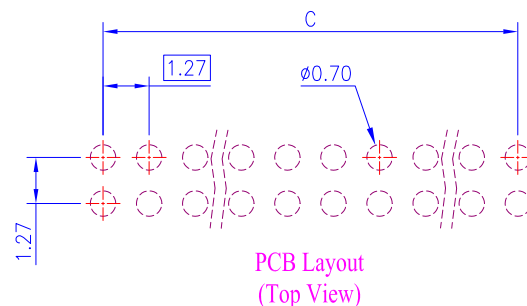
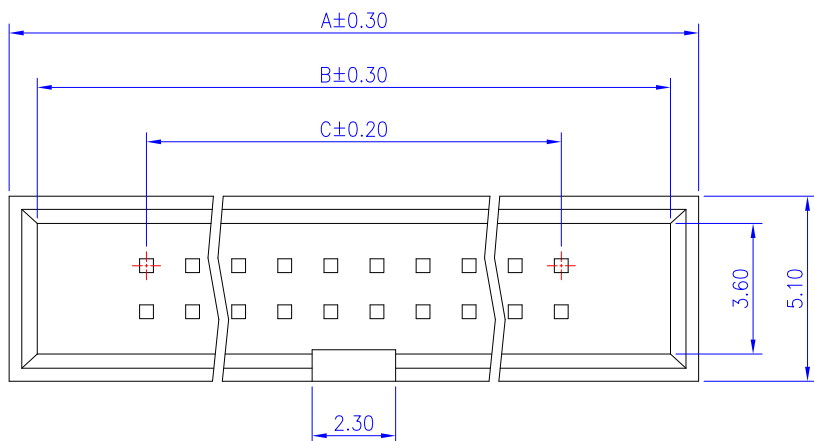


Material and Finish

1. Housing: LCP (UL94V-0), Black.
2. Terminal: Sq. 0.40mm Copper Alloy, Gold Plating

Electrical Characteristics

1. Current Rating: 1.0 Amp. Max..
2. Dielectric Withstand Voltage: 600V AC RMS for 60Seconds.
3. Insulation Resistance: 1000M Ohms Min. at 500V DC.

Mechanical Characteristics

1. Operating Temperature: -55°C ~ +105°C

Order Information	Dimensions			
	Pos.	A	B	C
HAB-D-010	10	12.65	11.10	5.08
HAB-D-012	12	13.92	12.37	6.35
HAB-D-014	14	15.19	13.64	7.62
HAB-D-016	16	16.46	14.91	8.89
HAB-D-020	20	19.00	17.45	11.43
HAB-D-024	24	21.54	19.99	13.97
HAB-D-026	26	22.81	21.26	15.24
HAB-D-028	28	24.08	22.53	16.51
HAB-D-030	30	25.35	23.80	17.78
HAB-D-034	34	27.89	26.34	20.32
HAB-D-040	40	31.70	30.15	24.13
HAB-D-044	44	34.24	32.69	26.67
HAB-D-050	50	38.05	36.50	30.48
HAB-D-060	60	44.40	42.85	36.83
HAB-D-064	64	46.94	45.39	39.37
HAB-D-068	68	49.48	47.93	41.91
HAB-D-080	80	57.10	55.55	49.53
HAB-D-100	100	69.80	68.25	62.23

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION



ORDER INFORMATION

HAB-D-xxx-LF
SERIES LEADFREE
010~100WAY
180°SMT

DESCRIPTION: 1.27*1.27mm Box Header PCB Mount Vertical, Dual Rows (for IDC)

煜倫股份有限公司

www.morethanall.com