

SPECIFICATIONS


Voltage rating:300V AC,DC

Current rating:12A AC,DC

Withstanding voltage:1500V AC/minute

Insulation resistance:1000M OHM min

Temperature range:-25°C~+90°C

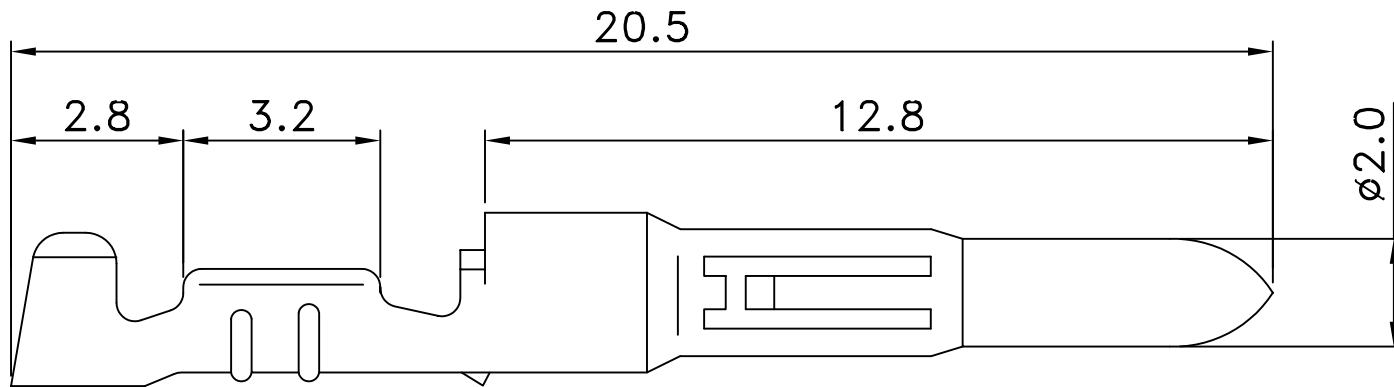

Part NO	WIRE RANGE	O.D.OF WIRE INSULATION	MATERIAL	PLATING	QUANTITY PER REEL
	AWG				
L-M-14	20-14	1.9-3.4	PHOSPHOR BRONZE	TIN-PLATED	3500
L-M-20	24-20	1.5-2.7	PHOSPHOR BRONZE	TIN-PLATED	5000

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

P PROJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

L-M-xx-LF
SERIES | LEADFREE
14:14~20WAY
20:20~24WAY
MALE TERMINAL

DESCRIPTION: