

Specifications

Current Rating:2Amp

Insulation Resistance:1000MΩMin.

Dielectric Withstanding Voltage:500VAC

Contact Resistance:20mΩMax.

Operating Temperature:-40°C to +105°C


Materials

Contact Material:Phosphor Bronze


Insulator Material:High Temperature

Thermoplastic, UL 94V-0 Nylon 6T

or the equivalent material

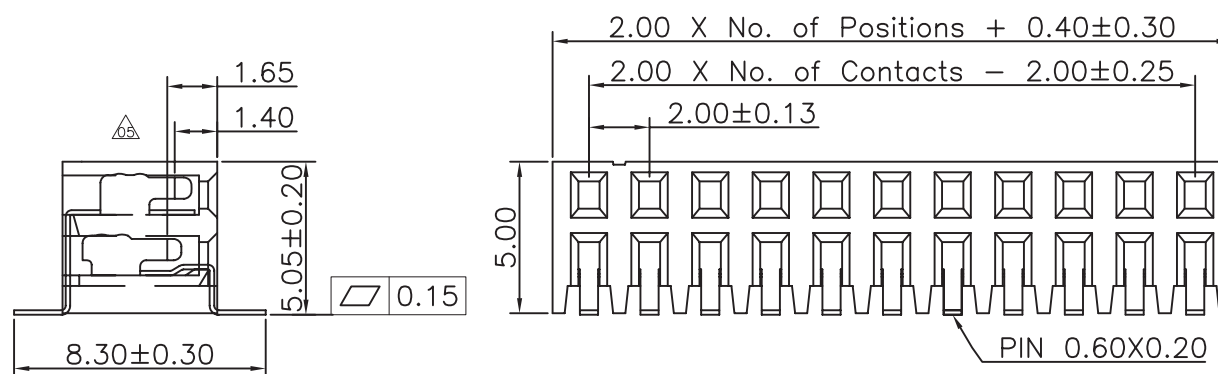

Recommended P.C.Board
Layout
(Tolerance: ± 0.05)

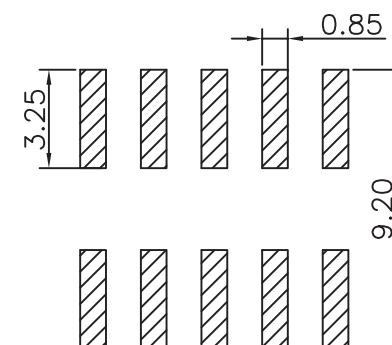

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION


X. ± 0.30

.X. ± 0.25


.XX ± 0.15

.XXX ± 0.10

ANG $\pm$



ORDER INFORMATION

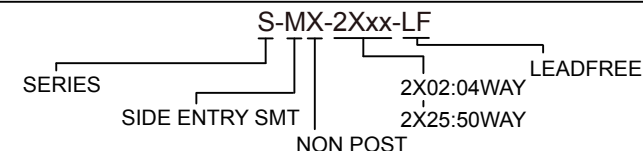

DESCRIPTION: 2.00 FEMALE HEADER
DUAL ROWS SMT TYPE CONNECTOR